

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/33773 A1

- (51) International Patent Classification⁷: **H04L 12/28**
- (21) International Application Number: **PCT/US00/30437**
- (22) International Filing Date:
2 November 2000 (02.11.2000)
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/163,171 2 November 1999 (02.11.1999) US
60/163,399 4 November 1999 (04.11.1999) US
60/236,222 28 September 2000 (28.09.2000) US
60/236,374 28 September 2000 (28.09.2000) US
- (74) Agent: **GELFOUND, Craig, A.; Christie, Parker & Hale, LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).**
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

- (71) Applicant (*for all designated States except US*): **BROADCOM CORPORATION [US/US]; 16215 Alton Parkway, Irvine, CA 92618-3616 (US).**
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **MIKHAK, Alan [US/US]; 16215 Alton Parkway, Irvine, CA 92618-3616 (US).**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **WIRELESS CABLE REPLACEMENT SYSTEM**

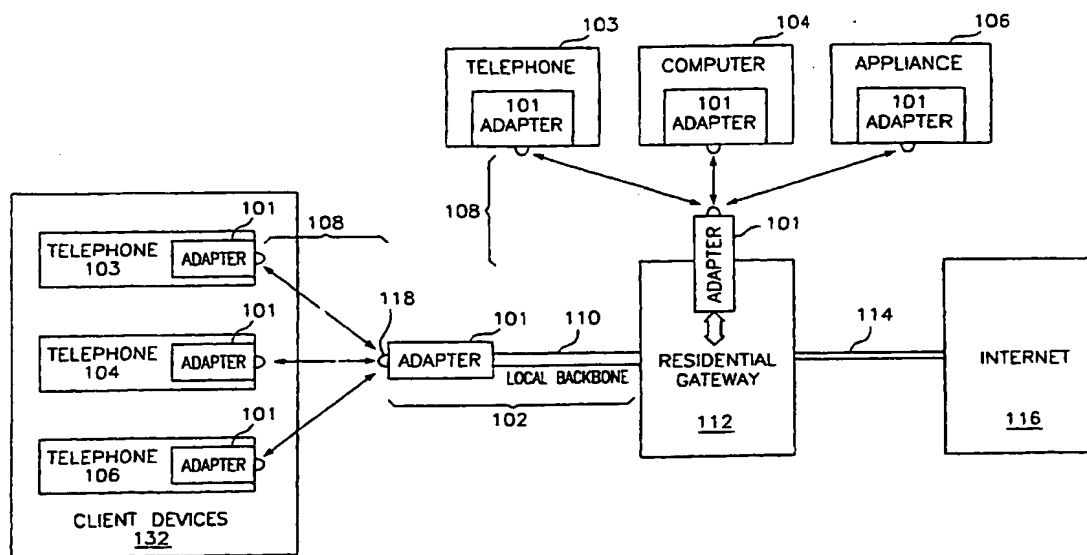

(57) Abstract: A wireless cable replacement system. A personal area network, comprising a device having a first wireless transceiver, and an adapter having a second wireless transceiver in communication with the first wireless transceiver, and a plug capable of mating to a jack coupled to a local backbone.

Best Available Copy

WIRELESS CABLE REPLACEMENT SYSTEM

BACKGROUND OF THE INVENTION

A local-area network (LAN) is a group of computing and telecommunications devices which are interconnected through a physical medium to facilitate the sharing of applications, data and peripherals. Local-area networks are generally confined to a single building. Ethernet is an exemplary local-area network which has enjoyed considerable success in the office environment. Typically, an Ethernet includes a local backbone with any number of access points to connect the computing and telecommunications devices. Each of these devices are wired to an access point using a coaxial cable that plugs into an Ethernet jack. The use of these cables to interconnect the computing and telecommunications devices is costly and labor intense. Accordingly, it would be desirable to connect a wide range of devices to a local area network easily and simply, without the need to purchase, store or connect cables. A wireless solution that readily interfaces with existing devices and local-area networks infrastructure would also be very convenient.

SUMMARY OF THE INVENTION

In one aspect of the present invention, a personal area network includes a device having a first wireless transceiver, and an adapter having a second wireless transceiver in communication with the first wireless transceiver, and a plug capable of mating to a jack coupled to a local backbone.

In another aspect of the present invention, a method of communication includes exchanging information over a wireless medium between a device and an adapter having a plug mated to a jack coupled to a local backbone, and communicating at least a portion of the information between the adapter and the local backbone.

In yet another aspect of the present invention, a personal area network includes a device having a first complementary metal-oxide semiconductor (CMOS) wireless transceiver, and an adapter having a second CMOS wireless transceiver in communication with the first CMOS wireless transceiver, and an interface to interface the second CMOS wireless transceiver to the local backbone.

In still another aspect of the present invention, a wall dongle includes a plug capable of mating to a jack coupled to a local backbone, an interface coupled to the plug, and a wireless transceiver coupled to the interface.

In a further aspect of the present invention, a method of interfacing a wireless communication medium to a local backbone includes using a wall dongle to exchange information with an external device over a wireless medium, the wall dongle having an adapter

1 plugged into a jack coupled to a local backbone, and communicating at least a portion of the information between the wall dongle adapter and the local backbone.

5 In yet a further aspect of the present invention, a device dongle includes a plug capable of mating to a jack coupled to a device, an interface coupled to the plug, and a wireless transceiver coupled to the interface.

10 In still a further aspect of the present invention, a method of interfacing a wireless communication medium to a device includes using a device dongle to exchange information with an external device over a wireless medium, the device dongle having an adapter plugged into a jack coupled to the device, and communicating at least a portion of the information between the device dongle and the device.

15 In another aspect of the present invention, a communications network includes a device having a first wireless transceiver, a second wireless transceiver in communication with the first wireless transceiver, a local backbone coupled to the second wireless transceiver, and an Internet gateway coupled to the local backbone.

20 In yet another aspect of the present invention, a communications network includes a plurality of devices each having a wireless transceiver, a local backbone, an access point to the local backbone, the access point having an access wireless transceiver in communication with the wireless transceiver for each of the devices, and an Internet gateway coupled to the local backbone.

25 In still another aspect of the present invention, a method of communication includes exchanging information over a wireless medium between a device and an access point to a local backbone, communicating at least a portion of the information between the access point and the local backbone, and coupling the communicated information between the local backbone and an Internet gateway.

30 It is understood that other embodiments of the present invention will become readily apparent to those skilled in the art from the following detailed description, wherein it is shown and described only embodiments of the invention by way of illustration of the best modes contemplated for carrying out the invention. As will be realized, the invention is capable of other and different embodiments and its several details are capable of modification in various other respects, all without departing from the spirit and scope of the present invention. Accordingly, the drawings and detailed description are to be regarded as illustrative in nature and not as restrictive.

35 DESCRIPTION OF THE DRAWINGS

These and other features and advantages of the present invention will be better understood from the following detailed description read in light of the accompanying drawings, wherein:

1

FIG. 1 is a block diagram of a cable replacement system utilized in a LAN and coupled to an Internet via a gateway;

5

FIG. 2 is a block diagram of an exemplary embodiment of a DOCSIS compliant cable modem utilized as a residential gateway;

FIG. 3 presents a data flow diagram that describes the flow of transport packets in the residential gateway;

FIG. 4 is a block diagram of an adapter embodiment that interfaces with the exemplary cable modem MAC via the gateway bus;

10

FIG. 5 is a block diagram of a transceiver and network interface;

FIG. 6 is a block diagram of a transceiver in accordance with an exemplary embodiment of the present invention;

FIG. 7 is a block diagram of the transceiver blocks including a receiver, transmitter and local oscillator in accordance with an exemplary embodiment of the present invention;

15

FIG. 8 is a block diagram of a wall dongle;

FIG. 9 is a block diagram of a device dongle; and

FIG. 10 is a representation of the physical construction of a dongle.

Like reference numerals are used to designate like parts in the accompanying drawings.

20

25

30

35

1 DETAILED DESCRIPTION OF THE INVENTION

5 A wireless cable replacement system is typically utilized in a networked environment. The cable replacement system allows wiring to be replaced with more flexible connectivity as supplied via one or more wireless links. A typical environment where a wireless cable replacement system would be utilized includes a home network, or a local area network (LAN). Home networks are typically utilized to allow appliances, computers, telephones, televisions and other devices equipped with suitable interfaces to communicate throughout the home and to an external Internet. A LAN typically interconnects, or networks, business equipment such as faxes, telephones, and computers together and to an external Internet. Typical communications protocols include HPNA in a home environment and ethernet in a business environment.

10 Integration of the various devices being networked is typically accomplished in a gateway device. The gateway provides signal processing to allow data from the various devices coupled to a backbone to be packetized in a suitable format for transmission over an Intranet and/or an Internet. Processing of a signal for transmission is typically implemented in a layered structure as is known to those skilled in the art. In particular digital signal processing (DSP) methods are utilized to allow multiple devices to communicate over a packet based network through the layered structure.

15 A gateway provides an interface in the architecture of a packetized data transmission system between networks having differing characteristics. The embodiments of a wireless cable replacement are applicable to any type of network separated by one or more gateways, including residential gateways or other types of gateways known to those skilled in the art. A residential gateway is typically a gateway that is suitable for use in interfacing a home or office network typically utilizing telephone circuits for Intranet interconnections to an Intranet, typically utilizing a cable television (CATV) network, or public switched telephone network (PSTN) via a digital subscriber line (DSL) to access an Internet.

20 In the exemplary residential gateway DSP techniques are utilized to allow multiple channel of data supplied by differing devices such as computers, appliances and telephones present on the Internet to be individually packetized and transferred between networks such as an Internet and Intranet.

25 Special packetization procedures are typically utilized to allow for the various communication capabilities of the coupled devices and the transmission capabilities of the wiring in the Intranet. The telephone wiring typically found in a home and utilized in an Intranet, or home network, is not an optimum way to transfer data. Signal processing that effectively accommodates the characteristics of the wired network coupled to is typically present in the hardware and software of the particular gateway.

1 Gateway functions, including residential gateway functions, are provided in a variety of hardware configurations including a personal computer, a set top box or the exemplary set top box that is described in the following paragraphs.

5 FIG. 1 is a block diagram of a cable replacement system utilized in a LAN 102 and coupled to an Internet 116 via a gateway 112. An embodiment of the present invention is directed to a system and technique to deliver services in the home using existing wire pairs, and wireless cable replacement systems already installed in the home all while not disrupting existing services provided on the existing wire pair.

10 A series of adaptors 101 are provided to establish a wireless link through a wireless medium such as RF or infrared 108. Adaptors present in the client devices 132, and coupled to a local backbone 110 make up a portion of the wireless cable replacement system. The local backbone includes all of the wiring interconnecting the individual client devices 132 to a main wiring bus emanating from the residential gateway.

15 In addition an adaptor is shown as part of the residential gateway 112. This embodiment couples signals from the bus of a cable modem MAC (not shown) included in the residential gateway to the adaptor.

20 A residential gateway may be installed at a location inside or outside the home. The residential gateway accepts inputs from an IP network on one side that is capable of delivering IP (Internet Protocol) services to the home. The other side of the residential gateway 10 can be the interface to the in home wiring that previously delivered POTS. The exemplary embodiment shown in FIG. 1 has two wire pairs, one pair continues to deliver POTS the other wire pair delivers POTS and other services to a local area network (LAN).

25 The residential gateway provides a means to convert the physical media and protocols used for the IP network to the physical media and protocols (typically HomePNA) used on the in home wire pairs. The in home wire pairs that couple client devices 132 to the residential gateway 112 are termed a local backbone 110. In alternative embodiments the residential gateway provides a means to convert the physical media and protocols used for the IP network to the physical media and protocols used on the LAN backbone (typically Ethernet, ADSL and IDSL) In the described exemplary embodiment, a DOCSIS (Data Over Cable Service Interface Specification) network is used for delivery of IP services over the IP network (an HFC network coupled to a CATV network). A consequence of this choice is that the residential gateway includes a cable modem. In alternative embodiments a modem may be provided that is coupled to the PSTN via digital subscriber line technology.

30 The described exemplary embodiment uses two well-known protocols for delivery of in home services. The first protocol is a base band protocol to deliver POTS. This protocol is

1 described by Bellcore (now Telcordia) in TR-NWT-000057. The second protocol is HomePNA (Home Phoneline Network Alliance) as described in the Version 2.0 specification.

5 The function of the residential gateway can be divided into three components along service delivery lines. The first is delivery of broadband data services. This function is the primary function of the cable modem as described by the CableLabs DOCSIS specification. Data service is delivered using Ethernet as specified by CableLabs in the DOCSIS specification, and alternatively by HPNA.

10 The second function is the POTS interface. The gateway contains the high voltage circuits and the processing elements necessary to convert packetized voice delivered over IP streams to the continuous analog voltages required for the POTS interface.

The third function is a proxy for the voice over HPNA phones 103 connected to the HPNA network 102. The Proxy performs an interface conversion function at two levels, first is a transport packet conversion and the second is the signaling protocol conversion.

15 Two POTS phones are shown 102. Both of these are traditional telephones connected to the residential gateway for telephone service. As described above, for installations where only a single wire pair is available in the home as a local backbone, only one phone line is used, that would be the phone attached to the HomePNA network. Not shown in this drawing is the possibility of bridging additional POTS telephones on the wire pair, or local backbone 110. In this system, these bridged phones will behave as a bridged phone on a traditional POTS line. All bridged telephones are assigned to the same phone number and the ring/dial tone behavior is as described in TR-NWT-000057.

20 Home appliance control is represented by an appliance block 106. The concept here is to allow appliance controllers on the network to access control information for connected client devices 132. For example, a connected personal computer 104 might control the start time for an appliance 106, such as a coffee maker.

25 Another possible client device 132, is a connected printer device. This can be any type of computer peripheral that permits resource sharing from any of multiple personal computers or other control devices connected to the HomePNA network.

30 The HomePNA phone 103 shown is a telephone that integrates the function of the HomePNA adapter and the telephone. This phone looks and works just like any traditional telephone, the difference is that it uses the HPNA interface to accomplish the voice transport and signaling functions instead of the POTS interface.

35 Also shown is the connection of two personal computers 104 running application software such as Netscape. Any application can be substituted here, the important feature of these applications is that they connect to the world wide net 116 (or Internet) through the residential gateway 112.

1 An additional appliance 106 that may be connected to the HomePNA network is a
television. This can be used to display television programming streamed from the external IP
network or spooled from memory systems of an attached video server. This video server could
5 be a dedicated device for this purpose or specialized programming on one of the attached
personal computers.

 A cable modem provides an access point for a home network or Intranet to an Internet via
a CATV connection. Equivalently a DSL capable modem supplies the capabilities for coupling
a home network, or Intranet to an Internet via a DSL line and the PSTN. Those skilled in the art
10 will realize that any number of gateway configurations may be utilized in a system utilizing a
wireless cable replacement system. In particular a cable modem utilized as a gateway processes
packetized data for transmittal over the CATV network in compliance with a transmission
standard known as DOCSIS.

 FIG. 2 is a block diagram of an exemplary embodiment of a DOCSIS compliant cable
15 modem utilized as a residential gateway. The gateway includes adaptor circuitry 101 that is
coupled to the cable modem MAC 1112. The described exemplary embodiment may provide a
highly integrated solution implemented single chip that is compliant with the (DOCSIS).
DOCSIS was developed to ensure that cable modem equipment built by a variety of
manufacturers is compatible, as is the case with traditional dial-up modems. The described
20 exemplary embodiment can provide integrated functions for communicating with the CMTS.
For example, a QPSK upstream modulator 1102 transmits data to the far end data terminating
device, a QAM downstream demodulator 1100 receives data from the far end data terminating
device via a CMTS, and a QPSK out of band downstream demodulator 1106 receives out of
band MPEG-2 encoded messages from the CMTS.

25 In addition, the described exemplary embodiment can support multiple inputs in
accordance with a variety of protocols. For example, a universal serial bus transceiver 1104
provides transparent bi-directional IP traffic between devices operating on a USB such as for
example a PC workstation, server printer or other similar devices and the far end data terminating
device. Additionally, an I.E.E.E. 802.3 compliant media independent interface (MII) 110 in
30 conjunction with an Ethernet MAC 1134 also provide bi-directional data exchange between
devices such as, for example a number of PCs and or Ethernet phones and the far end data
terminating device. A voice and data processor 1160 is used for processing and exchanging
voice, as well as fax and modem data between packet based networks and telephony devices.

35 The QAM downstream demodulator 1100 may utilize either 64 QAM or 256 QAM in the
54 to 860 MHZ bandwidth to interface with the CMTS. The QAM downstream demodulator
1100 accepts an analog signal centered at the standard television IF frequencies, amplifies and
digitizes the signal with an integrated programable gain amplifier and A/D converter. The

1 digitized signal is demodulated with recovered clock and carrier timing. Matched filters and
then adaptive filters remove multi-path propagation effects and narrowband co-channel
interference. Soft decisions are then passed off to an ITU-T J.83 Annex A/B/C compatible
5 decoder. The integrated decoder performs error correction and forwards the processed received
data, in either parallel or serial MPEG-2 format to a DOCSIS Media Access Controller (MAC)
1112.

The output of the downstream demodulator 1100 is coupled to the DOCSIS MAC 1112.
The DOCSIS MAC 1112 may include baseline privacy encryption and decryption as well as
robust frame acquisition and multiplexing with MPEG2-TS compliant video and audio streams.
10 The DOCSIS MAC 1112 implements the downstream portions of the DOCSIS protocol. The
DOCSIS MAC 1112 extracts DOCSIS MAC frames from MPEG-2 frames, processes MAC
headers, and filters and processes messages and data.

Downstream data packets and message packets may be then placed in system memory
1114 by a SDRAM interface 1116 via the internal system bus 1118. The SDRAM interface 1116
15 preferably interfaces to a number of off the shelf SDRAMs which are provided to support the
high bandwidth requirements of the Ethernet MAC 1112 and other peripherals. The SDRAM
interface 1116 may support multiple combinations of 8, 116 or 32 bit wide SDRAMs, allowing
for external data storage in the range of about 2 to 32 MBytes. The DOCSIS MAC 1112 includes
20 a number of direct memory access (DMA) channels for fast data access to and from the system
memory 1114 via the internal system bus 1118.

The upstream modulator 1102 provides an interface with the CMTS. The upstream
modulator 1102 may be configured to operate with numerous modulation schemes including
QPSK and 16-QAM. The upstream modulator 1102 supports bursts or continuous data, provides
forward error correction (FEC) encoding and pre-equalization, filters and modulates the data
25 stream and provides a direct 0-65 MHz analog output.

The DOCSIS MAC 1112 can also implement the upstream portions of the DOCSIS
protocol before transmission by the upstream modulator 1102. The DOCSIS MAC 1112 receives
data from one of the DMA channels, requests bandwidth and frames the data for TDMA with
other modems on the same upstream frequency.
30

The DOCSIS MAC interfaces with the MIPS core 1128 via the ISB 1118. An exemplary
embodiment of the MIPS core 1128 includes a high performance CPU operating at a speed of at
least 80 MHz with 32-bit address and data paths. The MIPS core includes two way set
associative instruction and data caches on the order of about 4kbytes each. The MIPS core 1128
35 can provide standard EJTAG support with debug mode, run control, single step and software
breakpoint instruction as well as additional optional EJTAG features.

1 The upstream modulator 1102 and the downstream demodulator 1100 are controlled by
the MIPS core 1128 via a serial interface which is compatible with a subset of the Motorola
M-Bus and the Philips I2C bus. The interface consists of two signals, serial data (SDA) and
5 serial clock (SCL), which may control a plurality of devices on a common bus. The addressing
of the different devices may be accomplished in accordance with an established protocol on the
two wire interface.

The described exemplary embodiment of the network gateway includes a full-speed
universal serial bus (USB) transceiver 1104 and USB MAC 1122 which is compliant with the
10 USB 1.1 specification. The USB MAC 1122 provide concurrent operation of control, bulk,
isochronous and interrupt endpoints. The USB MAC 1122 also can support standard USB
commands as well as class/vendor specific commands. The USB MAC 1122 include integrated
RAM which allows flexible configuration of the device. Two way communication of
information to a device operating on a USB can be provided, such as for example a PC on a USB
15 1.1 compliant twisted pair. The USB MAC 1122 can be arranged for hardware fragmentation of
higher layer packets from USB packets with automatic generation and detection of zero length
USB packets. The USB MAC 1122 may include DMA channels which are used to communicate
received data to the system memory 1114 via the internal system bus 1118. Data stored in system
memory 1114 may then be processed and communicated to the cable modem termination
20 system(not shown) via the DOCSIS MAC 1112 and the upstream modulator 1102. Similarly
data received from the cable modem termination system and processed by the downstream
demodulator 1100 and stored in system memory as higher layer packets can be retrieved by the
USB MAC 1122 via the ISB 1118 and assembled into USB packets with automatic generation
of zero length USB packets. USB packets may then be communicated to the external device
25 operating on the USB via the USB transceiver 1104.

A media independent interface (MII) 1110 can provide bi-directional communication with
devices such as for example a personal computer (PC) operating on an Ethernet. The media
independent interface 1110 can forward data to and receive information from the Ethernet MAC
1134. The Ethernet MAC 1134 can also perform all the physical layer interface (PHY) functions
30 for 100BASE-TX full duplex or half-duplex Ethernet as well as 10BBASE-T full or half duplex.

The Ethernet MAC 1134 can also decode the received data in accordance with a variety of
standards such as for example 4B5b, MLT3, and Manchester decoding. The Ethernet MAC can
perform clock and data recovery, stream cipher de-scrambling, and digital adaptive equalization.
The Ethernet MAC 1134 may include DMA channels which are used for fast data
35 communication of processed data to the system memory 1114 via the internal system bus 1118.
Processed data stored in system memory 1114 may then be communicated to the cable modem
termination system(not shown) via the upstream modulator 1102. Similarly, data received from

1 the cable modem termination system is processed by the downstream demodulator 1100 and
stored in system memory as higher layer packets which can then be retrieved by the Ethernet
MAC 1134 via the ISB 1118 and encoded into Ethernet packets for communication to the
5 external device operating on the Ethernet via the MII 1110. The Ethernet MAC 1134 may also
perform additional management functions such as link integrity monitoring, etc.

10 In addition to the SDRAM interface 1116, the described exemplary embodiment of the
gateway includes a 16-bit external bus interface (EBI) 1140 that supports connection to flash
memories 1142, external SRAM 1144 or EPROMS 1144. Additionally, the EBI 1140 may be
used to interface the described exemplary network gateway with additional external peripherals.
The EBI 1140 can provide a 24 bit address bus and a 16-bit bi-directional data bus. Separate read
and write strobes can be provided along with multiple firmware configurable chip select signals.
Each chip select can be fully programmable, supporting block sizes between about 4 K-bytes and
15 8 M-bytes, extended clock cycle access control and 8 or 16-bit selection of peripheral data bus
width. In the described embodiment, the EBI 1140 can support both synchronous and
asynchronous transfers. Pseudonymous transfers may be supported through the use of read/write
strobes to indicate the start and duration of a transfer. The EBI 1140 can include DMA access
capability to or from the SDRAM interface 1116. The DMA operation may take one or more
forms. For example, in EBI mode, an EBI bridge can act as the DMA controller, and perform
20 all pointer and buffer management tasks during DMA operations. In an external mode, an
external device can act as the DMA controller and the EBI 1140 can serve as a simple bridge.
In DMA mode the MIPS core 1128 can be responsible for DMA setup.

25 The network gateway may be vulnerable to network breaches due to peripheral devices
such as PC employing windows or network Macintosh computers. These operating systems
include "file sharing" and "printer sharing" which allow two or more networked computers in a
home or office to share files and printers. Therefore the exemplary embodiment of the gateway
includes IP security module 1148 which interfaces with ISB 1118. The MIPS core 1128 can
set-up and maintain all security associations. The MIPS core 1128 can also filter all IP traffic and
route any messages requiring security processing to the security module via the ISB 1118. The
30 security module 150 may support single DES (CBC and ECB modes) triple DES (CBC and ECB
modes) MD-5 and SHA authentication in hardware to provide support for virtual private
networks.

35 The security module 1148 can implement the basic building blocks of the developing IP
Security Standard (IPsec). The security module 1148 may also be used to implement any other
security scheme that uses the same basic blocks as IPsec, which uses two protocols to provide
traffic security. A first protocol, IP Encapsulating Security Payload (ESP), provides private data
privacy with encryption and limited traffic flow confidentiality. ESP may also provide

1 connection less integrity, data source authentication and an anti-replay service. A second format,
IP Authentication Header (AH), provides connection less integrity, data source authentication and
an optical anti-replay service. Both protocols may be used to provide access based on the
5 distribution of cryptographic keys and the management of traffic flows. The protocols may be
used alone or in combination to satisfy the security requirements of a particular system. In
addition, the security module 1148 can support multiple modes of operation depending on a
security association to the traffic carried by a simplex connection. For example, transport mode
security association between two hosts, primarily protects protocols above the IP layer while
10 tunnel mode security association provides security and control to a tunnel of IP packets.

The exemplary security module 1148 addresses possible differences in packet format
between IPsec and future security applications with a generalized scheme to determine where the
authentication / encryption algorithms are applied with a data packet. The authentication /
encryption algorithms consider each packet to consists of three parts, a header, body and trailer.
15 The appropriate algorithm can be applied, using any specified parameters to the body section
only.

In an encryption mode, the security module 1148 can add and initialize any necessary
headers, determine necessary parameters, generate the associated control message and add the
control and data message. In the authentication mode, the control fields of the received data
20 packets are parsed, the parameters are determined via a security association lookup table, control
message is created and the control and data messages are queued.

The exemplary embodiment of the network gateway includes a DMA controller 1150
having a number of channels that enable direct access over the ISB 1118 between peripherals and
the system memory 1114. With the exception of the security module 1148, packets received by
25 the network gateway 98 cause DMA transfers from a peripheral to memory, which is referred to
as a receive operation. A DMA transfer from memory to a peripheral is referred to as a transmit
operation. Programmable features in each channel can allow DMA controller 1150 to manage
maximum ISB burst lengths for each channel, enable interrupts, halt operation in each channel,
and save power when certain modules are not operational. The maximum ISB burst length may
30 be programmed independently for each channel preferably up to 64 32 bit words. Each channel
can include maskable interrupts connected to the MIPS core 1128 which indicate buffer
complete, packet complete and or invalid descriptor detected. Busy DMA channels may be
stalled or completely disabled by the MIPS core 1128. Source clocks (not shown) for each
channel are can be connected to the channels based on the internal peripheral they service. For
35 power reduction, these clocks may be turned off and on coincident with the respective
peripheral's clock.

1 The DMA controller 1150 can be operable in both non-chaining and chaining mode. In
the non-chaining mode the DMA channel refers to its internal registers for the pertinent
information related to a scheduled DMA burst transfer. The DMA controller can set-up the
5 buffer start address, byte count, and status word registers before initiating the DMA channel for
each allocated buffer. In the transmit direction, the DMA channels can send the specified number
of bytes (preferably up to 4095) from the specified byte address. In the receive direction, the
DMA channels can insert data into a specified memory location until a buffer has been
completely filled or the end of a packet is detected.

10 In the chaining mode, the system memory can be partitioned, preferably using descriptor
rings containing pointers to memory buffers as well as status information for each memory
buffer. The MIPS core 1128 can write the descriptor pointers while the DMA controller 1150
follows by inserting/taking data into/from the location designated by the descriptor. Upon
completion of the transfer of a buffer, the DMA controller 1150 effectively clears the descriptor
15 by updating the status to indicate that the data has been inserted/taken. Specific information may
be added to the descriptor to indicate the length of data in the block, specifying whether the data
is the first or last block of a packet, etc.

 In the downstream direction, the MIPS core 1128 can fill or recognize a data block for a
particular DMA channel, then write the next unused descriptor in the ring indicating that the
20 block is filled and where the downstream data exists in memory. The DMA controller 1150 can
follow the DSP write to the descriptor ring, sending out data and clearing the descriptor when the
transfer is complete. When the DMA controller 1150 reads a descriptor that does not contain
valid data, it can go idle until initiated by the DSP core.

 In the upstream direction, the MIPS core 1128, can allocate memory space for incoming
25 data, then write the descriptor with the start address for that buffer. The DMA controller 1150
read the base address and insert data until either the buffer is full or an end of packet has been
detected. The DMA controller 1150 can update the descriptor, communicating to the MIPS
core 1128 that the block is full, indicating the length of the data on the block, and/or asserted first
and or last buffer flags.

30 The described exemplary network gateway can include a voice processor 1160 for
processing and transporting voice over packet based networks such as PCs running network on
a USB (Universal Serial Bus) or an asynchronous serial interface, Local Area Networks (LAN)
such as Ethernet, Wide Area Networks (WAN) such as Internet Protocol (IP), Frame Relay (FR),
Asynchronous Transfer Mode (ATM), Public Digital Cellular Network such as TDMA (IS-13x),
35 CDMA (IS-9x) or GSM for terrestrial wireless applications, or any other packet based system.
The described embodiment of the voice processor 1160 also supports the exchange of voice, as
well as fax and modem, between a traditional circuit switched network or any number of

1 telephony devices and the CMTS (not shown). The voice processor may be implemented with a variety of technologies including, by way of example, embedded communications software that enables transmission of voice over packet based networks.

5 The described exemplary embodiment of the cable modem acting as a network gateway includes integrated peripherals including independent periodic interval timers 1180, a dual universal asynchronous receiver-transmitter (UART) 1182 that handles asynchronous serial communication, a number of internal interrupt sources 1184, and a GPIO module 1186 that provides multiple individually configurable input/output ports. In addition, multiple GPIO ports
10 can be provided to drive various light emitting diodes (LEDs) and to control a number of external SLICs. A peripheral bus bridge 1186 can be used to interface the low speed peripheral to the internal system bus 1118.

The described exemplary embodiment also includes an HPNA MAC (not shown) which provides an interface between the HomePNA network and the MIPS processor.

15 The embodiment presented is described in more detail in co-pending U.S. Application entitled "Gateway with Voice," filed April 13, 2000, U.S. Patent Application No. 60/129,134. The disclosure thereof is incorporated herein in its entirety by reference.

FIG. 3 presents a data flow diagram that describes the flow of transport packets in the residential gateway previously described. The DOCSIS Interface is the primary interface to the
20 DOCSIS network within the residential gateway. All packets that arrive to or leave from the residential gateway via the DOCSIS network must go through the DOCSIS interface block. As shown all packets arriving from the DOCSIS network go through the DOCSIS interface block and are delivered to the packet based network filter. The DOCSIS interface block translates the packet format as represented in the DOCSIS network to an internal format that is used for all
25 packet filter and routing functions within the residential gateway.

The DOCSIS packet filter accepts packets from the DOCSIS interface and makes a routing decision based on the destination address within the packet. The destination of the packet will be one of three possibilities: (1) VoIP Packets for the proxy gateway, (2) VoIP packets for the telephony interface controller or (3) data packets delivered directly to the packet based network
30 interface.

The packet based network interface is the primary interface to the packet based network within the residential gateway. All packets that arrive to or leave from the residential gateway via the packet based network must go through the packet based network interface block. As shown all packets arriving from the packet based network go through the packet based network interface
35 block and are delivered to the packet based network filter. The packet based network interface block translates the packet format as represented in the packet based network to an internal format that is used for all packet filter and routing functions within the residential gateway.

1 The packet based network filter accepts packets from the packet based network interface and makes a routing decision based on the destination address within the packet. The destination of the packet will typically be one of two possibilities: (1) VoHN packets for the proxy gateway,
5 or (2) data packets delivered directly to the DOCSIS interface.

 The proxy gateway performs a translation function between the packets in the VoHN format to packets in the VoIP format. The specific translation is direction dependent. Packets arriving from the packet based network filter are translated to a VoIP format and delivered to the DOCSIS interface. Packets arriving from the DOCSIS packet filter are translated to a VoHN
10 format and delivered to the packet based network interface.

 As previously mentioned a home network typically utilizes telephone wiring and connecting jacks typically found in a home. The cable replacement system typically replaces a telephone line that would be utilized to couple a client device to the telephone wall jack. In an alternative Ethernet embodiment Ethernet cabling and interfaces provide the network protocols and interfaces that the wireless cable replacement replaces and interfaces to. The wireless cable replacement system utilizes dongles, devices that provide half of the wireless cable replacement function, to establish a series of wireless links.
15

 Typically a wall dongle couples to, or is integral with a telephone wall jack. The wall dongle is in communication via a wireless link to a device dongle that is coupled to a data IO port of a client device. In the exemplary embodiment a Bluetooth transceiver provides the wireless coupling between dongles. A Bluetooth transceiver provides a robust wireless link between dongles that is typically immune to jammers and other interference. However, those skilled in the art will realize that transceivers built to accommodate other types of wireless transmission standards will provide equivalent functionality.
20

 FIG. 4 is a block diagram of an adaptor embodiment that interfaces with the exemplary cable modem MAC via a gateway bus. A residential gateway 112, as previously described, includes a cable modem MAC bus 1118 of FIG. 2. Thus the cable modem MAC bus 1118 is coupled to a device dongle 136 via connector 129.
25

 Device dongle 136 includes a connector 129 coupling signals to an adaptor 101. The adaptor 101 includes a network interface 122 coupled to a transceiver 124 and are both disposed on a substrate 142. Wireless signals are received and transmitted by transceiver 124. Transceiver 124 is coupled to network interface 122. Network interface 122 reformats packetized data being transferred between the cable modem MAC bus 1118 and the transceiver 124 such that the transceiver may communicate with the gateway. Reformatting of the data is accomplished by conventional circuitry known to those skilled in the art. In the exemplary embodiment, the network interface 122 includes conventional circuitry for converting a Bluetooth radio signal to a format compatible with the cable modem MAC bus.
30
35

1 FIG. 5 is a block diagram of a transceiver and network interface. An RF/IF interface
connection is typically provided to an antenna (not shown) by an RF/IF interface 139. RF/IF
interface 139 is typically provided by a RF transceiver. In an exemplary embodiment, the RF/IF
5 interface 139 is provided by a Bluetooth transceiver.

The RF/IF interface is coupled to a conventionally constructed digital transmitter 140 and
to a conventionally constructed digital receiver 148 via receiver data line 149. A synthesizer
control line 145 couples the RF/IF interface 139 to a conventionally constructed frequency
control block 146. The frequency control block is in turn coupled to a conventionally
10 constructed base band controller core 144.

The base band controller core 144 is coupled to the digital transmitter 140 via Tx
control/data line 141. The digital receiver 148 is coupled to the base band controller core 144
via Rx control/data line 143. The base band controller core 144 is coupled to a conventionally
constructed timing control block 147 and to the network interface 125.

15 A transceiver embodiment that functions in compliance with the Bluetooth transmission
standard, is suitable for integration onto a single CMOS substrate, and functions as the exemplary
RF/IF interface (139 of FIG. 5) is described in the following paragraphs. The transceiver is
typically integrated onto the CMOS substrate with the network interface. Although a CMOS
circuit is described, those skilled in the art will realize that other equivalent integrated circuit
20 technologies may be utilized.

In accordance with an exemplary embodiment of the present invention, a transceiver
utilizes a combination of frequency planning, circuit design, layout and implementation,
differential signal paths, dynamic calibration, and self-tuning to achieve robust performance over
process variation and interference. This approach allows for the full integration of the transceiver
onto a single IC for a low cost, low power, reliable and more compact solution. This can be
25 achieved by (1) moving external bulky and expensive image reject filters, channel select filters,
and baluns onto the RF chip; (2) reducing the number of off-chip passive elements such as
capacitors, inductors, and resistors by moving them onto the chip; and (3) integrating all the
remaining components onto the chip. As those skilled in the art will appreciate, the described
exemplary embodiments of the transceiver do not require integration into a single IC and may
30 be implemented in a variety of ways including discrete hardware components.

FIG. 6 is a block diagram of an exemplary embodiment of the transceiver including an
antenna 8, a switch 9, a receiver 10, a transmitter 12, a local oscillator (LO) generator (also called
a synthesizer) 14, a controller 16, and a self-testing unit 18. All of these components can be
35 packaged for integration into a single IC including components such as filters and inductors.

The transceiver can operate in either a transmit or receive mode. In the transmit mode,
the transmitter 12 is coupled to the antenna 8 through the switch 9. The switch 9 provides

1 sufficient isolation to prevent transmitter leakage from desensitizing or damaging the receiver
10. In the receive mode, the switch 9 directs signal transmissions from the antenna 8 to the
receiver 10. The position of the switch 9 can be controlled by an external device (not shown)
5 such as a computer or any other processing device known in the art.

The receiver 10 provides detection of desired signals in the presence of noise and
interference. It should be able extract the desired signals and amplify it to a level where
information contained in the received transmission can be processed. In the described exemplary
embodiment, the receiver 10 is based on a heterodyne complex (I-Q) architecture with a
10 programmable intermediate frequency (IF). The LO generator 14 provides a reference signal to
the receiver 10 to downconvert the received transmission to the programmed IF.

A low IF heterodyne architecture is chosen over a direct conversion receiver because of
the DC offset problem in direct conversion architectures. DC offset in direct conversion
architectures arises from a number of sources including impedance mismatches, variations in
threshold voltages due to process variations, and leakage from the LO generator to the receiver.
15 With a low IF architecture, AC coupling between the IF stages can be used to remove the DC
offset.

The transmitter 12 modulates incoming data onto a carrier frequency. The modulated
carrier is upconverted by the reference signal from the LO generator 14 and amplified to a
20 sufficient power level for radiation into free space through the antenna 8. The transmitter uses
a direct conversion architecture. With this approach only one step of upconversion is required
This leads to a reduction in both circuit complexity and power consumption.

The controller 16 performs two functions. The first function provides for adaptive
programming of the receiver 10, transmitter 14 and LO generator 16. By way of example, the
25 transceiver can be programmed to handle various communication standards for local area
networks (LAN) and personal area networks (PAN) including HomeRF, IEEE 802.11, Bluetooth,
or any other wireless standard known in the art. This entails programming the transceiver to
handle different modulation schemes and data rates. The described exemplary embodiment of
the transceiver can support modulation schemes such as Binary Phase Shift Keying (BPSK),
30 Quadrature Phase Shift Keying (QPSK), offset quadrature phase shift keying (OQPSK), Multiple
frequency modulations such as M level frequency shift keying (FSK), Continuous Phase
Frequency Shift Keying modulation (CFSK), Minimum Shift Keying modulation (MSK),
Gaussian filtered FSK modulation (GFSK), and Gaussian filtered Minimum Shift Keying
(GMSK), Phase/Amplitude modulation (such as Quadrature Amplitude Modulation (QAM)),
35 orthogonal frequency modulation (such as Orthogonal Frequency Division Multiplexing
(OFDM)), direct sequence spread spectrum systems, and frequency hopped spread spectrum
systems and numerous other modulation schemes known in the art. Dynamic programming of

1 the transceiver can also be used to provide optimal operation in the presence of noise and interference. By way of example, the IF can be programmed to avoid interference from an external source.

5 The second function provides for adaptive calibration of the receiver 10, transmitter 14 and LO generator 16. The calibration functionality controls the parameters of the transceiver to account for process and temperature variations that impact performance. By way of example, resistors can be calibrated within exacting tolerances despite process variations in the chip fabrication process. These exacting tolerances can be maintained in the presence of temperature changes by adaptively fine tuning the calibration of the resistors.

10 The controller 16 can be controlled externally by a central processing unit (CPU), a microprocessor, a digital signal processor (DSP), a computer, or any other processing device known in the art. In the described exemplary embodiment, a control bus 17 provides two way communication between the controller 16 and the external processing device (not shown). This communication link can be used to externally program the transceiver parameters for different modulation schemes, data rates and IF operating frequencies. The output of the controller 16 is used to adjust the parameters of the transceiver to achieve optimal performance in the presence of process and temperature variations for the selected modulation scheme, data rate and IF.

15 The self-testing unit 18 generates test signals with different amplitudes and frequency ranges. The test signals are coupled to the receiver 10, transmitter 12 and LO generator 14 where they are processed and returned to the self-testing unit 18. The return signals are used to determine the gain, frequency characteristics, selectivity, noise floor, and distortion behavior of the receiver 10, transmitter 12 and LO generator 14. This is accomplished by measuring the strength of the signals output from the self-testing unit 18 against the returned signals over the tested frequency ranges. In an exemplary embodiment of the self-testing unit 18, these measurements can be made with different transceiver parameters by sweeping the output of the controller 16 through its entire calibrating digital range, or alternatively making measurements with the controller output set to a selected few points, by way of example, at the opposite ends of the digital range.

20 In the described exemplary embodiment, the self-testing unit 18 is in communication with the external processing device (not shown) via the control bus 17. During self-test, the external processing device provides programming data to both the controller 16 and the self-testing unit 18. The self-testing unit 18 utilizes the programming data used by the controller 16 to set the parameters of the transceiver to determine the gain, frequency characteristics, selectivity, noise floor, and distortion behavior of the receiver 10, transmitter 12 and LO generator 14.

25 FIG. 7 shows a block diagram of the transceiver in accordance with an embodiment of the invention. The described exemplary embodiment is integrated into a single IC. For ease of

1 understanding, each component coupled to the controller is shown with a "program" designation
or a "calibration" designation. These designations indicate whether the component is
5 programmed by the controller or calibrated by the controller. In practice, in accordance with the
described exemplary embodiment of the present invention, the components that are programmed
receive the MSBs and the components that are calibrated receive the LSBs. The components
requiring both programming and calibration receive the entire digital output from the controller.
As those skilled in the art will appreciate, any number of methodologies may be used to deliver
10 programming and calibration information to the individual components. By way of example, a
single controller bus could be used having the programming and or calibration data with the
appropriate component addresses.

The receiver 10 front end includes a low noise amplifier (LNA) 22 which provides high
gain with good noise figure performance. Preferably, the gain of the LNA 22 can be set by the
controller (not shown) through a "select gain" input to maximize the receivers dynamic range.
15 The desirability of dynamic gain control arises from the effect of blockers or interferers which
can desensitize the LNA. Conventional filter designs at the input of the LNA 22 may serve to
sufficiently attenuate undesired signals below a certain power level, however, for higher power
blockers or interferers, the LNA 22 should be operated with low gain.

The output of the LNA 22 is downconverted to a low IF frequency by the combination of
20 complex IF mixers 24 and a complex bandpass filter 26. More particularly, the output of the
LNA 22 is coupled to the complex IF mixers 24 which generate a spectrum of frequencies based
upon the sum and difference of the received signal and the RF clocks from the LO generator.
The complex bandpass filter passes the complex IF signal while rejecting the image of the
received signal. The image rejection capability of the complex IF mixers 24 in cooperation with
25 the complex bandpass filter 26 eliminates the need for the costly and power consuming preselect
filter typically required at the input of the LNA for conventional low IF architectures.

The output of the complex bandpass filter 26 is coupled to a programmable multiple gain
stage amplifier 28. The amplifier 28 can be designed to be programmable to select between a
limiter and an automatic gain control (AGC) feature, depending on the modulation scheme used
30 in the transceiver. The limiting amplifier can be selected if the transceiver uses a constant
envelope modulation such as FSK. AGC can be selected if the modulation is not a constant
envelope, such as QAM. In addition, the bandwidth of the amplifier 28 can be changed by the
controller to accommodate various data rates and modulation schemes.

The output of the amplifier 28 is coupled to a second set of complex IF mixers 30 where
35 it is mixed with the IF clocks from the LO generator for the purpose of downconverting the
complex IF signal to baseband. The complex IF mixers 30 not only reject the image of the

1 complex IF signal, but also reduces some of the unwanted cross modulation spurious signals thereby relaxing the filtering requirements.

5 The complex baseband signal from the mixers 30 is coupled to a programmable passive polyphase filter within a programmable low pass filter 32. The programmable low pass filter 32 further filters out higher order cross modulation products. The polyphase filter can be centered at four times the IF frequency to notch out one of the major cross modulation products which results from the multiplication of the third harmonic of the IF signal with the IF clock. After the complex baseband signal is filtered, it either is passed through an analog-to-digital (A/D) converter 34 to be digitized or is passed to an analog demodulator 36. The analog demodulator 10 36 can be implemented to handle any number of different modulation schemes by way of example FSK. Embodiments of the present invention with an FSK demodulator uses the A/D converter 36 to sample baseband data with other modulation schemes for digital demodulation in a digital signal processor (not shown).

15 The LO generator 14 provides the infrastructure for frequency planning. The LO generator 14 includes an IF clock generator 44 and an RF clock generator 47. The IF clock generator includes an oscillator 38 operating at a ratio of the RF signal (f_{OCS}). High stability and accuracy can be achieved in a number of ways including the use of a crystal oscillator.

20 The reference frequency output from the oscillator 38 is coupled to a divider 40. The divider 40 divides the reference signal f_{OSC} by a number L to generate the IF clocks for downconverting the complex IF signal in the receiver to baseband. A clock generator 41 is positioned at the output of the divider 40 to generate a quadrature sinusoidal signal from the square wave output of the divider 40. Alternatively, the clock generator 41 can be located in the receiver. The divider 40 may be programmed by through the program input. This feature allows 25 changes in the IF frequency to avoid interference from an external source.

30 The output of the divider 40 is coupled to the RF clock generator 47 where it is further divided by a number n by a second divider 42. The output of the second divider 42 provides a reference frequency to a phase lock loop (PLL) 43. The PLL includes a phase detector 45, a divide by M circuit 46 and a voltage controlled oscillator (VCO) 48. The output of the VCO 48 is fed back through the divide by M circuit 46 to the phase detector 45 where it is compared with the reference frequency. The phase detector 45 generates an error signal representative of the phase difference between the reference frequency and the output of the divide by M circuit 46. The error signal is fed back to the control input of the VCO 48 to adjust its output frequency f_{VCO} until the VCO 48 locks to a frequency which is a multiple of the reference frequency. The 35 VCO 48 may be programmed by setting M via the controller through the program input to the divide by M circuit 46. The programmability resolution of the VCO frequency f_{VCO} is set by

1 the reference frequency which also may be programmed by the controller through the program input of the divider 42.

5 In the described exemplary embodiment, the VCO frequency is sufficiently separated (in frequency) from the RF frequency generated by the transmitter 12 to prevent VCO pulling and injection lock of the VCO. Transmitter leakage can pull the VCO frequency toward the RF frequency and actually cause the VCO to lock to the RF signal if their frequencies are close to each other. The problem is exasperated if the gain and tuning range of the VCO is large. If the frequency of the RF clocks is f_{LO} , then the VCO frequency can be defined as: $f_{VCO} = Nf_{LO} / (N+1)$. This methodology is implemented with a divide by N circuit 50 coupled to the output of the VCO 48 in the PLL 43. The output of the VCO 48 and the output of the divide by N circuit 50 are coupled to a complex mixer 52 where they are multiplied together to generate the RF clocks. A filter 53 can be positioned at the output of the complex mixer to remove the harmonics and any residual mixing images of the RF clocks. The divide by N circuit can be
10 programmable via the controller through the select input.

15 For example, if $N=2$, then $f_{VCO} = (2/3)f_{LO}$, and if $N=3$, then $f_{VCO} = (3/4)f_{LO}$.

A VCO frequency set at $2/3$ the frequency of the RF clocks works well in the described exemplary embodiment because the transmitter output is sufficiently separated (in frequency) from the VCO frequency. In addition, the frequency of the RF clocks is high enough so that its harmonics and any residual mixing images such as $f_{VCO} \times 1 - (1/N)$, $3f_{VCO} \times 1 + (1/N)$, and $3f_{VCO} \times 1 - (1/N)$ are sufficiently separated (in frequency) from the transmitter output to relax the filtering requirements of the RF clocks. The filtering requirements do not have to be sharp because the filter can better distinguish between the harmonics and the residual images when they are separated in frequency. Programming the divide by N circuit 50 also provides for the quadrature outputs of the divide by N circuit. Otherwise, with an odd number programmed, the
20 outputs of the divide by N circuit 50 would not be quadrature. For an odd number, the divider 50 outputs will be differential, but will not be 90 degrees out of phase, i.e., will not be I-Q signals.

25 In the described exemplary embodiment, the RF clocks are generated in the LO generator 14. This can be accomplished in various fashions including, by way of example, either generating the RF clocks in the VCO or using a polyphase circuit to generate the RF clocks. Regardless of the manner in which the RF clocks are generated, the mixer 52 will produce a spectrum of frequencies including the sum and difference frequencies, specifically, $f_{VCO} \times (1 + (1/N))$ and its image $f_{VCO} \times (1 - (1/N))$. To reject the image, the mixer 52 can be
30 configured as a double quadrature mixer as depicted in FIG. 3. The double quadrature mixer includes one pair of mixers 55, 57 to generate the Q-clock and a second pair of mixers 59, 61 to generate the I-clock. The Q-clock mixers utilizes a first mixer 55 to mix the I output of the VCO
35

1 48 (see FIG. 2) with the Q output of the divider 40 and a second mixer 57 to mix the Q output
of the VCO with the I output of the divider. The outputs of the first and second mixers are
connected together to generate the Q-clock. Similarly, the I-clock mixers utilizes a first mixer
5 59 to mix the I output of the divider with the Q output of the VCO and a second mixer 61 to mix
the Q output of the divider with the I output of the VCO. The outputs of the first and second
mixers are connected together to generate the I-clock. This technique provides very accurate
I-Q clocks by combination of quadrature VCO and filtering. Because of the quadrature mixing,
the accuracy of the I-Q clocks is not affected by the VCO inaccuracy, provided that the divide
10 by N circuit generates quadrature outputs. This happens for even divide ratios, such as N=2.

Optimized performance is achieved through frequency planning and implemented by
programmable dividers in the LO generator to select different ratios. Based on FIG. 2, all the
dependencies of the frequencies are shown by the following equation:

15
$$f_{LO} = f_{RF} - (M \times f_{OSC}/nL)(1 + 1/N) = f_{OSC}/L$$

where f_{RF} is frequency of the transmitter output

Turning back to FIG. 2, the transmitter 12 includes a complex buffer 54 for coupling
20 incoming I-Q modulated baseband signals to a programmable low-pass filter 56. The low-pass
filter 56 can be programmed by the controller through the select input. The output of the
low-pass filter 56 is coupled to complex mixers 58. The complex mixers 58 mixes the I-Q
modulated baseband signals with the RF clocks from the LO generator to directly upconvert the
baseband signals to the transmitting frequency. The upconverted signal is then coupled to an
25 amplifier 60 and eventually a power amplifier (PA) 62 for transmission into free space through
the antenna. A bandpass filter (not shown) may be disposed after the PA 62 to filter out
unwanted frequencies before transmission through the antenna.

In the described exemplary embodiment, the transmitter can be configured to minimize
spurious transmissions. Spurious transmissions in a direct conversion transmitter are generated
30 mainly because of the nonlinearity of the complex mixers and the DC offsets at the input to the
complex mixers. Accordingly, the complex mixers can be designed to meet a specified IIP3
(Input Intercept Point for the 3rd Harmonic) for the maximum allowable spurs over the frequency
spectrum of the communications standard. The DC offsets at the input to the complex mixers
can be controlled by the physical size of the transistors.

35 In addition, the transmitter can be designed to minimize spurious transmission outside the
frequency spectrum of the communications standard set by the FCC. There are two sources for
these spurs: the LO generator and the transmitter. These spurs can be suppressed by multiple

1 filtering stages in the LO generator and transmitter. Specifically, in the LO generator, due to the
complex mixing of the VCO signal with the output of the divide by N circuit, all the spurs are
at least f_{VCO}/N away from the RF clocks. By setting N to 2, by way of example, these
5 unwanted spurs will be sufficiently separated (in frequency) from the transmitted signal and are
easily removed by conventional filters in the LO generator and transmitter. Thus, the spurs will
be mainly limited to the harmonics of the transmitted signal, which are also sufficiently separated
(in frequency) from the transmitted signal, and therefore, can be rejected with conventional
filtering techniques. For further reduction in spurs, a dielectric filter may be placed after the PA
10 in the transmitter.

The transceiver embodiment presented is described in more detail in co-pending U.S.
Application entitled "Adaptive Transceiver," filed October 23, 2000, Atty Docket No.
40593/CAG/B600. The disclosure thereof is incorporated herein in its entirety by reference.

FIG. 8 is block diagram of a wall dongle. The wall dongle 138 provides a means of
15 coupling the adaptor 101 to the local backbone 110. In an exemplary embodiment, a local
backbone connection 110 is available through a telephone wall jack (not shown). This
connection is typically provided through an RJ-11 type phone jack. Connector 128, an RJ-11
phone plug in the exemplary embodiment, couples an external cable 120 to the local backbone
110. External cable 120 is coupled to a conventionally constructed network interface 122 which
20 is in turn coupled via connection 130 to a transceiver 124, including an emitter 118 utilized for
transmitting and receiving over the wireless link. The network interface 122 and transceiver
124 are typically integrated onto a substrate 142. In the described embodiment the substrate is
CMOS. However, alternative embodiments include differing substrates other than silicon
fabricated by the CMOS process. Also, differing processes known to those skilled in the art may
25 be used instead of the exemplary CMOS. In an alternative embodiment, network interface 122
and transceiver 124 are not disposed on a common substrate.

FIG. 9 is a block diagram of a device dongle. A device dongle 136 provides the second
half to the wireless cable replacement system. The device dongle 136 is coupled to the wall
dongle 138 through a wireless coupling mechanism. The wireless coupling mechanism includes
30 radio frequency coupling, and in an alternative embodiment infrared coupling.

A client device 132 typically includes a data I/O port 134 typically providing data
formatted in an Ethernet or HomePNA format utilized by the Intranet via the local backbone
connections. A connector 129 included in device dongle 136 is coupled to data I/O port 134 to
transfer data formatted according to the client device's architecture, to a network interface 122.
35 A conventionally constructed network interface 122 converts the data supplied by the data I/O
port 134 into a format suitable for presentation to transceiver 124.

1 In the described embodiments the network interfaces utilize conventionally constructed
circuitry to reformat a given data type, present on the Intranet or at the gateway, to data suitable
for transmission via a Bluetooth compatible transceiver. Several data types present on the
5 Intranet, or at the gateway, include PNA, ADSL, Ethernet and IDSL.

Typically the network interface 122 and the transceiver 124 are disposed on a common
substrate 142. However, in an alternative embodiment, the network interface 122 and the
transceiver 124 may be disposed on differing substrates.

FIG. 10 illustrates the physical construction of an exemplary dongle. The dongle can be
10 designed for interchangeable use in either the wall or the device. The dongle has high density
packaging with a light weight construction for ease of use. The dongle includes a transceiver
housing 160 formed of a suitably sturdy material. The transceiver housing 160 is coupled to a
connector 162 with a short cable 164. Various connector can be employed to support numerous
applications. By way of example, an RJ-45 connector can be used to access an Ethernet device
15 or Ethernet backbone depending on whether the dongle is used as a device dongle or wall dongle.
Alternatively, an RJ-11 connector can be used to access a telephony device, computer, or
appliance when used as a device dongle or an HPNA backbone when used as a wall dongle.
Those skilled in the art will appreciate that other connectors can be used to support other wireless
applications.

20 The transceiver housing 160 provides an enclosure for a network interface 166 positioned
rearwardly for easy coupling to the short cable 164. Forward of the network interface 166 is a
bluetooth transceiver 168. The bluetooth transceiver 168 includes an antenna 170 which
protrudes from the forward end of the transceiver housing 160 in manner which optimizes
reception and transmission coverage. The bluetooth transceiver 168 and the network interface
25 166 can be powered from a variety of sources and may receive supplemental power from a solar
panel 172 positioned within the transceiver housing 160.

Although a preferred embodiment of the present invention has been described, it should
not be construed to limit the scope of the appended claims. Those skilled in the art will
30 understand that various modifications may be made to the described embodiments. Moreover,
to those skilled in the various arts, the invention itself herein will suggest solutions to other tasks
and adaptations for other applications. It is therefore desired that the present embodiments be
considered in all respects as illustrative and not restrictive, reference being made to the appended
claims rather than the foregoing description to indicate the scope of the invention.

1 CLAIMS

- 5 1. A personal area network, comprising:
a device having a first wireless transceiver; and
an adapter having a second wireless transceiver in communication with the first
wireless transceiver, and a plug capable of mating to a jack coupled to a local backbone.
- 10 2. The personal area network of claim 1 wherein the first and second wireless
transceivers each comprises a Bluetooth transceiver.
3. The personal area network of claim 1 wherein the adapter further comprises an
interface between the second wireless transceiver and the local backbone.
- 15 4. The personal area network of claim 3 wherein the interface provides an interface
between the second wireless transceiver and the local backbone comprising a packet based
network.
- 20 5. The personal area network of claim 4 wherein the interface provides an interface
between the second wireless transceiver and the packet based network comprising a twisted pair
telephone line
- 25 6. The personal area network of claim 5 wherein the interface provides an interface
between the second wireless transceiver and the packet based network using a protocol for home
communications over a twisted pair telephone line.
- 30 7. The personal area network of claim 4 wherein the interface provides an interface
between the second wireless transceiver and the packet based network comprising an Ethernet
line.
- 35 8. The personal area network of claim 4 wherein the interface provides an interface
between the second wireless transceiver and the packet based network comprising a digital
subscriber line.
9. The personal area network of claim 1 wherein the plug is capable of mating to an
RJ-11 telephone jack.

- 1 10. The personal area network of claim 1 wherein the plug is capable of mating to an
RJ-45 Ethernet jack.
- 5 11. The personal area network of claim 1 wherein the device comprises a telephony
device.
12. The personal area network of claim 11 wherein the telephony device comprises a
telephone.
- 10 13. The personal area network of claim 12 further comprising a second telephone
having a third wireless transceiver in communication with the second wireless transceiver.
14. The personal area network of claim 13 further comprising a computer having a
15 fourth wireless transceiver in communication with the second wireless transceiver, and an
appliance having a fifth wireless transceiver in communication with the second wireless
transceiver.
15. The personal area network of claim 1 wherein the device comprises a computer.
- 20 16. The personal area network of claim 15 further comprising a second computer
having a third wireless transceiver in communication with the second wireless transceiver.
17. The personal area network of claim 1 wherein the device comprises an appliance.
- 25 18. The personal area network of claim 17 further comprising a second appliance
having a third wireless transceiver in communication with the second wireless transceiver.
19. A method of communication, comprising:
30 exchanging information over a wireless medium between a device and an adapter
having a plug mated to a jack coupled to a local backbone; and
 communicating at least a portion of the information between the adapter and the
local backbone.
- 35 20. The method of claim 19 wherein the information exchange between the device and
the adapter comprises using a Bluetooth protocol.

- 1 21. The method of claim 19 wherein the local backbone comprises a packet based network.
- 5 22. The method of claim 21 wherein the packet based network comprises a twisted pair telephone line.
- 10 23. The method of claim 22 wherein the communication between the adapter and the packet based network comprises using a protocol for home communications over the twisted pair telephone line.
24. The method of claim 21 wherein the packet based network comprises an Ethernet line.
- 15 25. The method of claim 21 wherein the packet based network comprises a digital subscriber line.
26. The method of claim 19 wherein the device comprises a telephony device.
- 20 27. The method of claim 26 wherein the telephony device comprises a telephone, and the information exchange between the first and second wireless transceivers comprises exchanging voice signals.
- 25 28. The method of claim 27 further comprising exchanging information between a second telephone and the adapter, wherein the communication between the adapter and the local backbone comprises communicating at least a portion of the exchanged information between the adapter and each of the telephones.
- 30 29. The method of claim 27 further comprising exchanging information between a computer and the adapter, and exchanging information between an appliance and the adapter, wherein the communication between the adapter and the local backbone comprises communicating at least a portion of the exchange information between the adapter and each of the telephone, computer and appliance.
- 35 30. The method of claim 19 wherein the device comprises a computer.

1 31. The method of claim 30 further comprising exchanging information between a
second computer and the adapter, wherein the communication between the adapter and the local
backbone comprises communicating at least a portion of the exchanged information between the
5 adapter and each of the computers.

 32. The method of claim 19 wherein the device comprises an appliance.

10 33. The method of claim 32 further comprising exchanging information between a
second appliance and the adapter, wherein the communication between the adapter and the local
backbone comprises communicating at least a portion of the exchanged information between the
adapter and each of the appliances.

 34. A personal area network, comprising:
15 a device having a first complementary metal-oxide semiconductor (CMOS)
wireless transceiver; and
 an adapter having a second CMOS wireless transceiver in communication with the
first CMOS wireless transceiver, and an interface to interface the second CMOS wireless
transceiver to the local backbone.

20 35. The personal area network of claim 34 wherein the first and second CMOS wireless
transceivers each comprises a Bluetooth transceiver.

25 36. The personal area network of claim 34 wherein the interface provides an interface
between the second CMOS wireless transceiver and the local backbone comprising a packet
based network.

30 37. The personal area network of claim 36 wherein the interface provides an interface
between the second CMOS wireless transceiver and the packet based network comprising a
twisted pair telephone line

35 38. The personal area network of claim 37 wherein the interface provides an interface
between the second CMOS wireless transceiver and the packet based network using a protocol
for home communications over a twisted pair telephone line.

- 1 39. The personal area network of claim 37 wherein the interface provides an interface
between the second CMOS wireless transceiver and the packet based network comprising an
Ethernet line.
- 5 40. The personal area network of claim 37 wherein the interface provides an interface
between the second CMOS wireless transceiver and the packet based network comprising a
digital subscriber line.
- 10 41. The personal area network of claim 34 wherein the device comprises a telephony
device.
42. The personal area network of claim 41 wherein the telephony device comprises a
telephone.
- 15 43. The personal area network of claim 42 further comprising a second telephone
having a third CMOS wireless transceiver in communication with the second CMOS wireless
transceiver.
- 20 44. The personal area network of claim 43 further comprising a computer having a
fourth CMOS wireless transceiver in communication with the second CMOS wireless
transceiver, and an appliance having a fifth CMOS wireless transceiver in communication with
the second CMOS wireless transceiver.
- 25 45. The personal area network of claim 41 wherein the device comprises a computer.
46. The personal area network of claim 45 further comprising a second computer
having a third CMOS wireless transceiver in communication with the second CMOS wireless
transceiver.
- 30 47. The personal area network of claim 41 wherein the device comprises an appliance.
48. The personal area network of claim 47 further comprising a second appliance
having a third wireless transceiver in communication with the second wireless transceiver.
- 35 49. A wall dongle, comprising:

1

a plug capable of mating to a jack coupled to a local backbone;
an interface coupled to the plug; and
a wireless transceiver coupled to the interface.

5

50. The wall dongle of claim 49 wherein the wireless transceiver comprises a Bluetooth transceiver.

10

51. The wall dongle of claim 49 wherein the interface provides an interface between the wireless transceiver and the local backbone comprising a packet based network.

52. The wall dongle of claim 51 wherein the interface provides an interface between the wireless transceiver and the packet based network comprising a twisted pair telephone line

15

53. The wall dongle of claim 52 wherein the interface provides an interface between the wireless transceiver and the packet based network using a protocol for home communications over a twisted pair telephone line.

20

54. The wall dongle of claim 51 wherein the interface provides an interface between the wireless transceiver and the packet based network comprising an Ethernet line.

55. The wall dongle of claim 51 wherein the interface provides an interface between the second wireless transceiver and the packet based network comprising a digital subscriber line.

25

56. The wall dongle of claim 49 wherein the plug is adapted to mate to an RJ-11 telephone jack.

57. The wall dongle of claim 49 wherein the plug is adapted to mate to an RJ-45 Ethernet jack.

30

58. The wall dongle of claim 49 wherein the interface and wireless transceiver each comprises CMOS.

35

59. The wall dongle of claim 58 further comprising a substrate, the CMOS interface and wireless transceiver each being disposed on the substrate.

1

60. A method of interfacing a wireless communication medium to a local backbone, comprising:

5

using a wall dongle to exchange information with an external device over a wireless medium, the wall dongle having an adapter plugged into a jack coupled to a local backbone; and communicating at least a portion of the information between the wall dongle adapter and the local backbone.

10

61. The method of claim 60 wherein the information exchange comprises using a Bluetooth protocol.

61. The method of claim 19 wherein the local backbone comprises a packet based network.

15

62. The method of claim 61 wherein the packet based network comprises a twisted pair telephone line.

20

63. The method of claim 62 wherein the communication between the second wireless transceiver and the packet based network comprises using a protocol for home communications over the twisted pair telephone line.

64. The method of claim 61 wherein the packet based network comprises an Ethernet line.

25

65. The method of claim 61 wherein the packet based network comprises a digital subscriber line.

30

66. A device dongle, comprising:
a plug capable of mating to a jack coupled to a device;
an interface coupled to the plug; and
a wireless transceiver coupled to the interface.

35

67. The device dongle of claim 66 wherein the wireless transceiver comprises a Bluetooth transceiver.

- 1 68. The device dongle of claim 66 wherein the interface provides an interface between
the wireless transceiver and the device comprising a telephone.
- 5 69. The device dongle of claim 66 wherein the interface provides an interface between
the wireless transceiver and the device comprising a computer.
70. The device dongle of claim 66 wherein the interface provides an interface between
the wireless transceiver and the device comprising an appliance.
- 10 71. The device dongle of claim 66 wherein the plug is adapted to mate to an RJ-11
telephone jack.
72. The device dongle of claim 66 wherein the plug is adapted to mate to an RJ-45
15 Ethernet jack.
73. The device dongle of claim 66 wherein the interface and wireless transceiver each
comprises CMOS.
- 20 74. The device dongle of claim 73 further comprising a substrate, the CMOS interface
and wireless transceiver each being disposed on the substrate.
75. A method of interfacing a wireless communication medium to a device,
comprising:
25 using a device dongle to exchange information with an external device over a
wireless medium, the device dongle having an adapter plugged into a jack coupled to the device;
and
 communicating at least a portion of the information between the device dongle and
the device.
- 30 75. The method of claim 75 wherein the information exchange comprises using a
Bluetooth protocol.
76. The method of claim 75 wherein the device comprises a telephone.
- 35 77. The method of claim 75 wherein the device comprises a computer.

- 1 78. The method of claim 75 wherein the device comprises an appliance.
- 5 79. A communications network, comprising:
a device having a first wireless transceiver;
a second wireless transceiver in communication with the first wireless transceiver;
a local backbone coupled to the second wireless transceiver; and
an Internet gateway coupled to the local backbone.
- 10 80. The communications network of claim 79 wherein the first and second wireless transceivers each comprises a Bluetooth transceiver.
81. The communications network of claim 79 wherein the local backbone comprising a packet based network.
- 15 82. The communications network of claim 81 wherein the packet based network comprising a twisted pair telephone line
83. The communications network of claim 82 wherein the second wireless transceiver is in communication with the packet based network using a protocol for home communications over a twisted pair telephone line.
- 20 84. The communications network of claim 81 wherein the packet based network comprising an Ethernet line.
- 25 85. The communications network of claim 81 wherein the packet based network comprising a digital subscriber line.
86. The communications network of claim 79 wherein the device comprises a telephony device.
- 30 87. The communications network of claim 86 wherein the telephony device comprises a telephone.
- 35 88. The communications network of claim 87 further comprising a second telephone having a third wireless transceiver in communication with the second wireless transceiver.

1 89. The communications network of claim 88 further comprising a computer having
a fourth wireless transceiver in communication with the second wireless transceiver, and an
5 appliance having a fifth wireless transceiver in communication with the second wireless
transceiver.

 90. The communications network of claim 79 wherein the device comprises a
computer.

10 91. The communications network of claim 90 further comprising a second computer
having a third wireless transceiver in communication with the second wireless transceiver.

 92. The communications network of claim 79 wherein the device comprises an
appliance.

15 93 The communications network of claim 92 further comprising a second appliance
having a third wireless transceiver in communication with the second wireless transceiver.

 94. The communications network of claim 79 wherein the Internet gateway comprises
20 a cable modem.

 95. A communications network, comprising:
a plurality of devices each having a wireless transceiver;
a local backbone;
25 an access point to the local backbone, the access point having an access wireless
transceiver in communication with the wireless transceiver for each of the devices; and
an Internet gateway coupled to the local backbone.

 96. The communications network of claim 95 wherein the wireless transceivers and the
30 access wireless transceiver each comprises a Bluetooth transceiver, the local backbone comprises
a twisted pair telephone line, and the Internet gateway comprises a cable modem.

 97. The communications network of claim 96 wherein the devices comprise a plurality
of telephones, a plurality of computers and a plurality of appliances.

35 98. A method of communication, comprising:

1 exchanging information over a wireless medium between a device and an access
point to a local backbone;
 communicating at least a portion of the information between the access point and
5 the local backbone; and
 coupling the communicated information between the local backbone and an Internet
gateway.

10 99. The method of claim 98 wherein the information exchange between the device and
the access point comprises using a Bluetooth protocol.

 100. The method of claim 98 wherein the local backbone comprises a packet based
network.

15 101. The method of claim 100 wherein the packet based network comprises a twisted
pair telephone line.

 102. The method of claim 101 wherein the communication between the access point and
the packet based network comprises using a protocol for home communications over the twisted
20 pair telephone line.

 103. The method of claim 100 wherein the packet based network comprises an Ethernet
line.

25 104. The method of claim 100 wherein the packet based network comprises a digital
subscriber line.

 105. The method of claim 98 wherein the device comprises a telephony device.

30 106. The method of claim 105 wherein the telephony device comprises a telephone, and
the information exchange between the first and second wireless transceivers comprises
exchanging voice signals.

35 107. The method of claim 106 further comprising exchanging information between a
second telephone and the adapter, wherein the communication between the adapter and the local
backbone comprises communicating at least a portion of the exchanged information between the
adapter and each of the telephones.

1

108. The method of claim 106 further comprising exchanging information between a computer and the adapter, and exchanging information between an appliance and the adapter, wherein the communication between the adapter and the local backbone comprises communicating at least a portion of the exchange information between the adapter and each of the telephone, computer and appliance.

5

109. The method of claim 98 wherein the device comprises a computer.

10

110. The method of claim 109 further comprising exchanging information between a second computer and the adapter, wherein the communication between the adapter and the local backbone comprises communicating at least a portion of the exchanged information between the adapter and each of the computers.

15

111. The method of claim 98 wherein the device comprises an appliance.

112. The method of claim 111 further comprising exchanging information between a second appliance and the adapter, wherein the communication between the adapter and the local backbone comprises communicating at least a portion of the exchanged information between the adapter and each of the appliances.

20

113. The method of claim 98 wherein the Internet gateway comprises a cable modem.

25

30

35

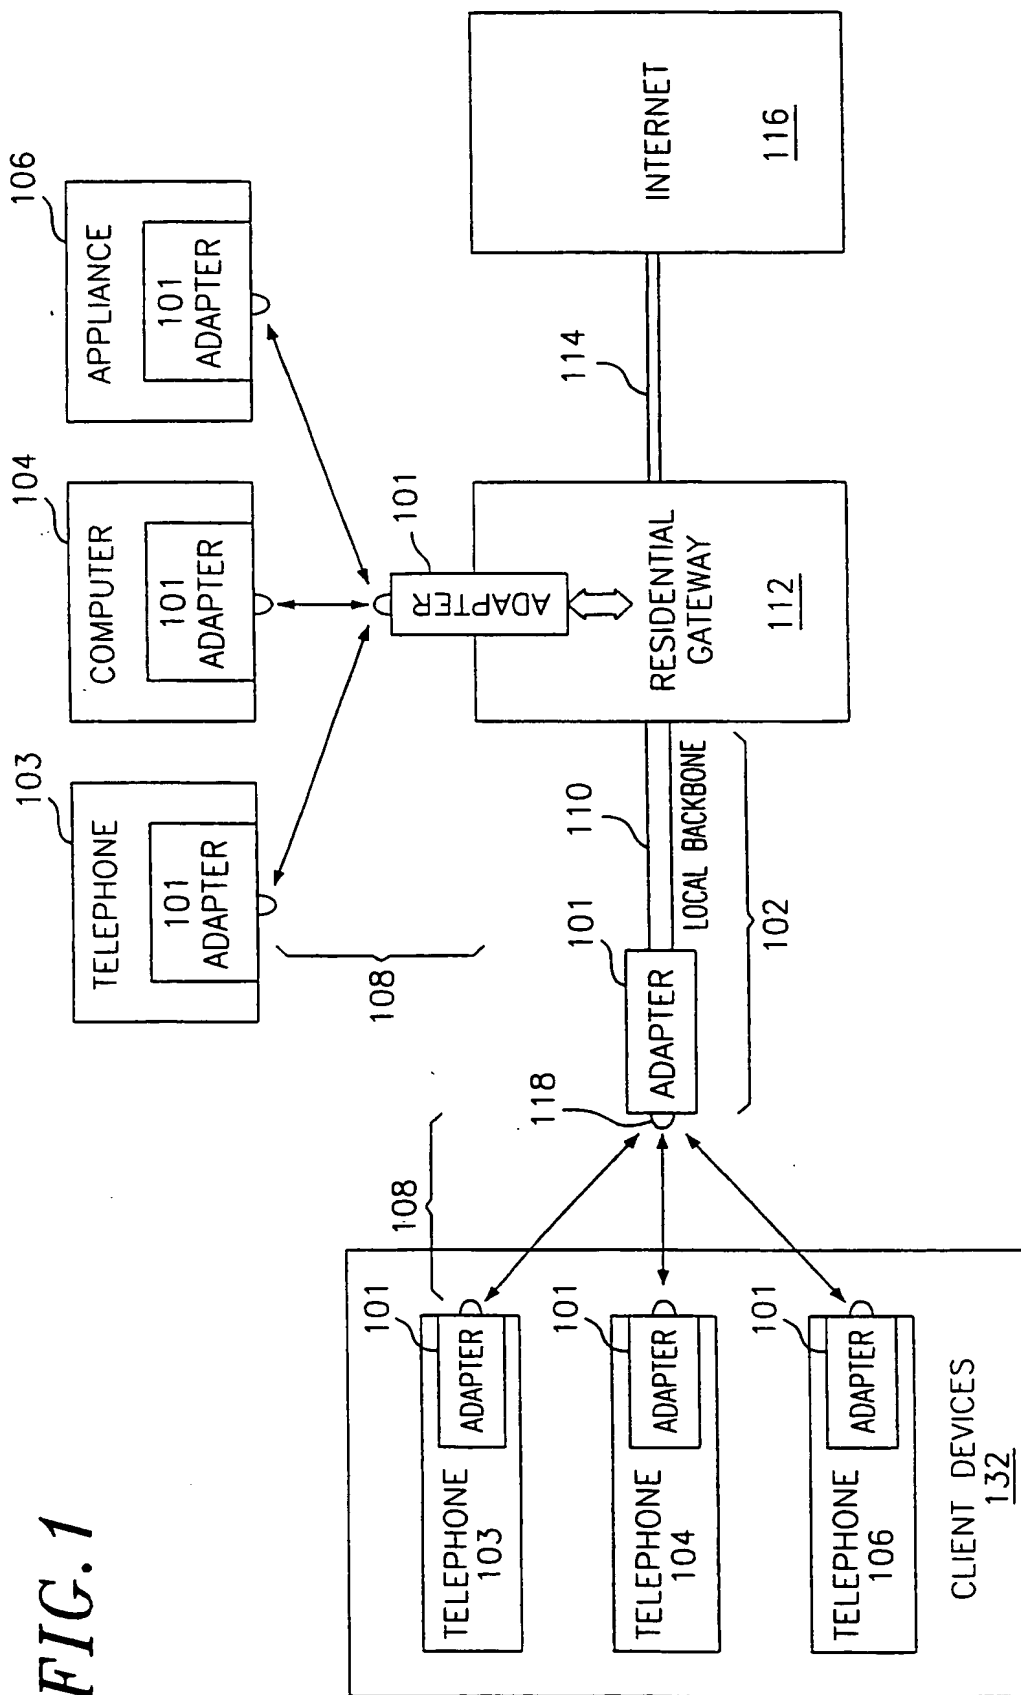


FIG. 1

FIG. 2

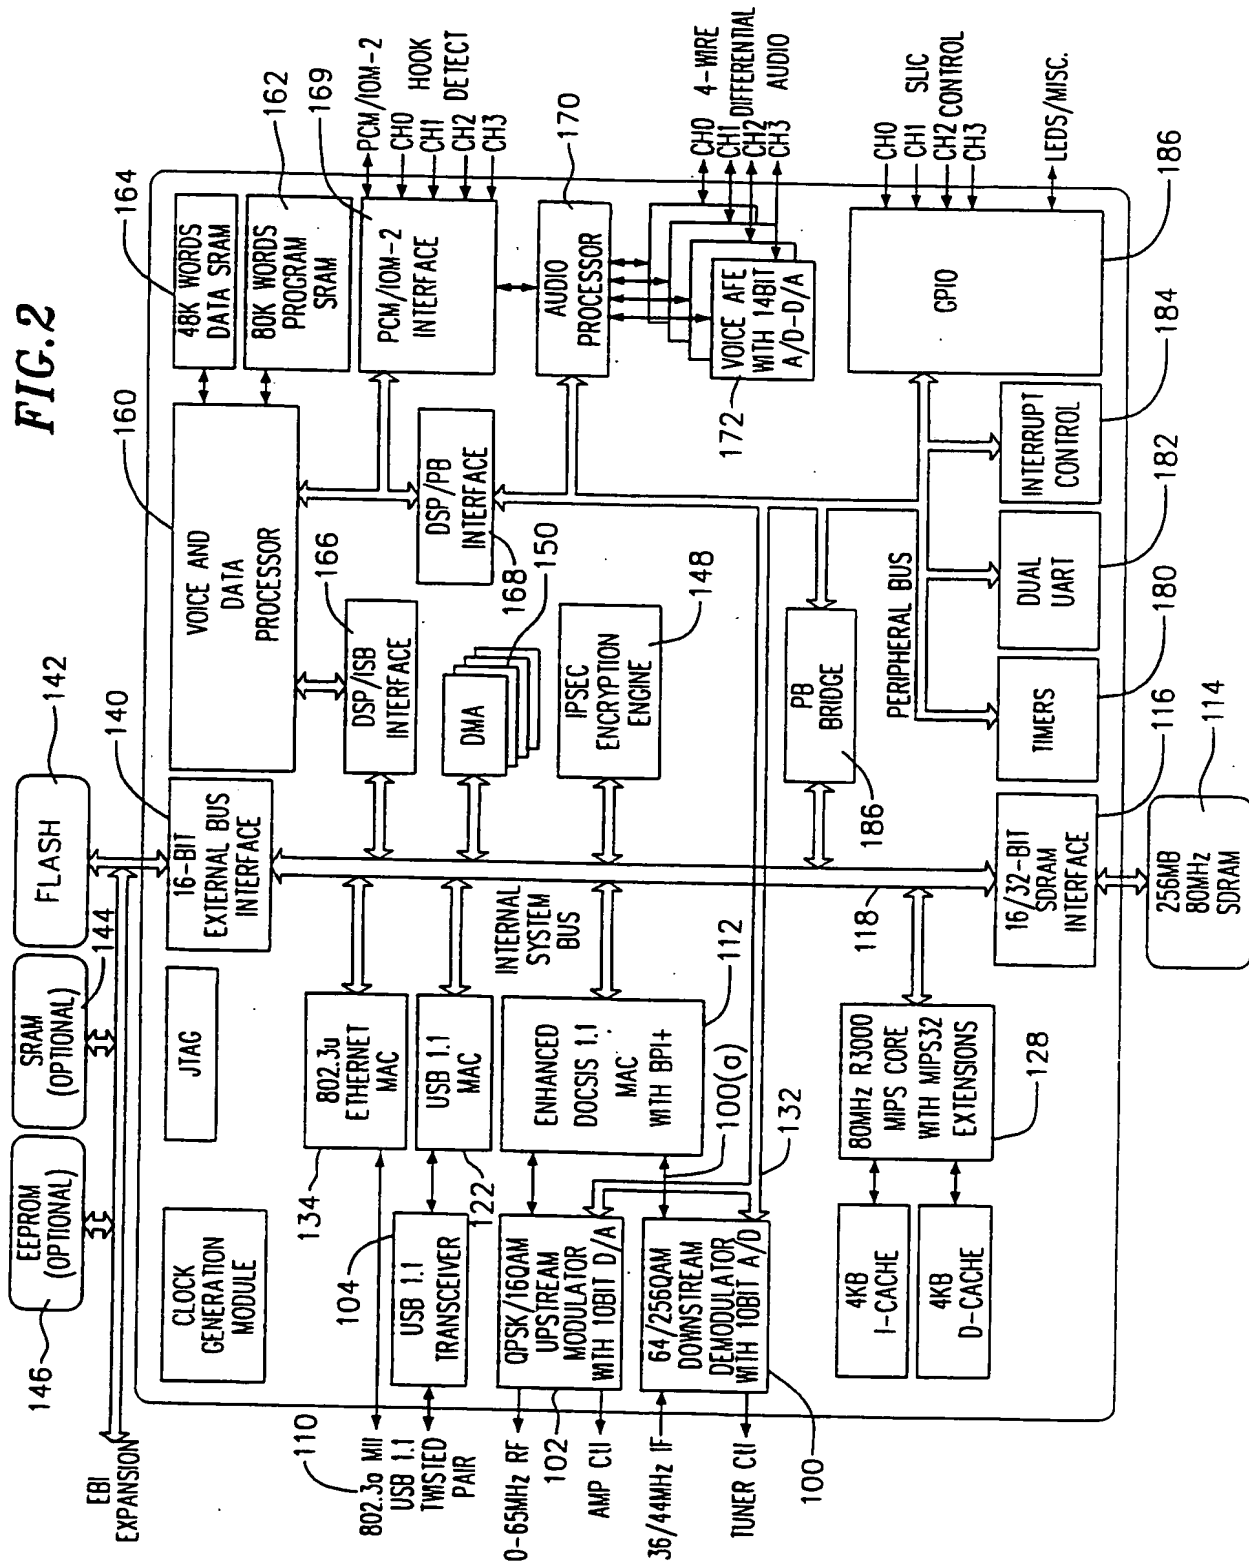


FIG. 3

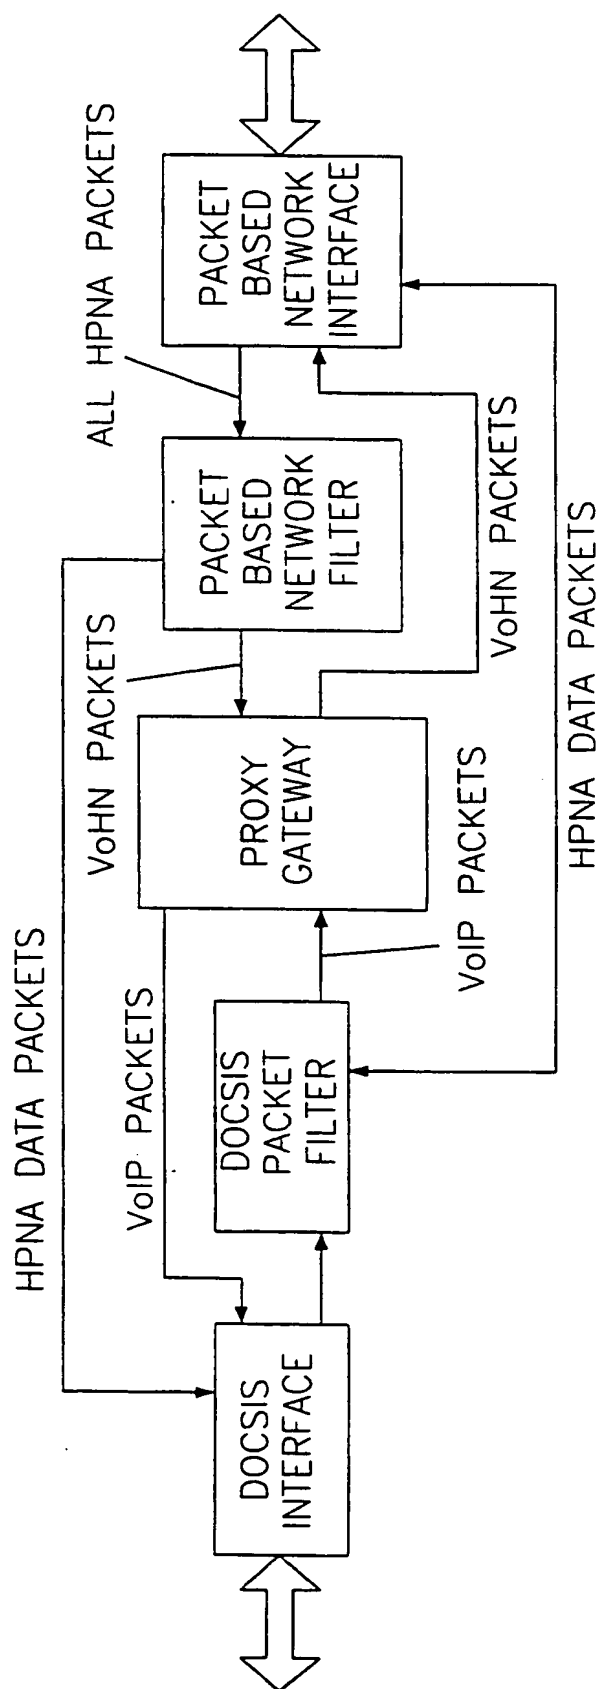


FIG. 4

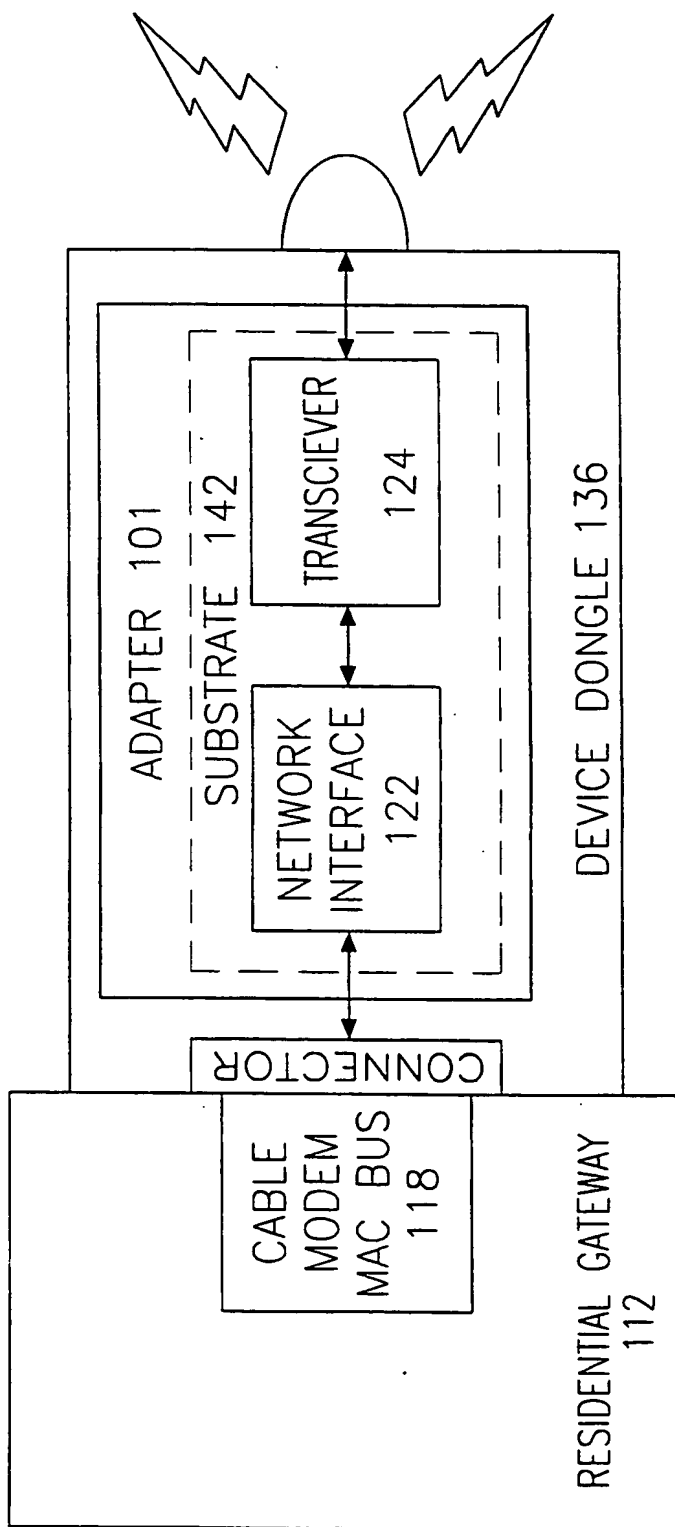


FIG. 5

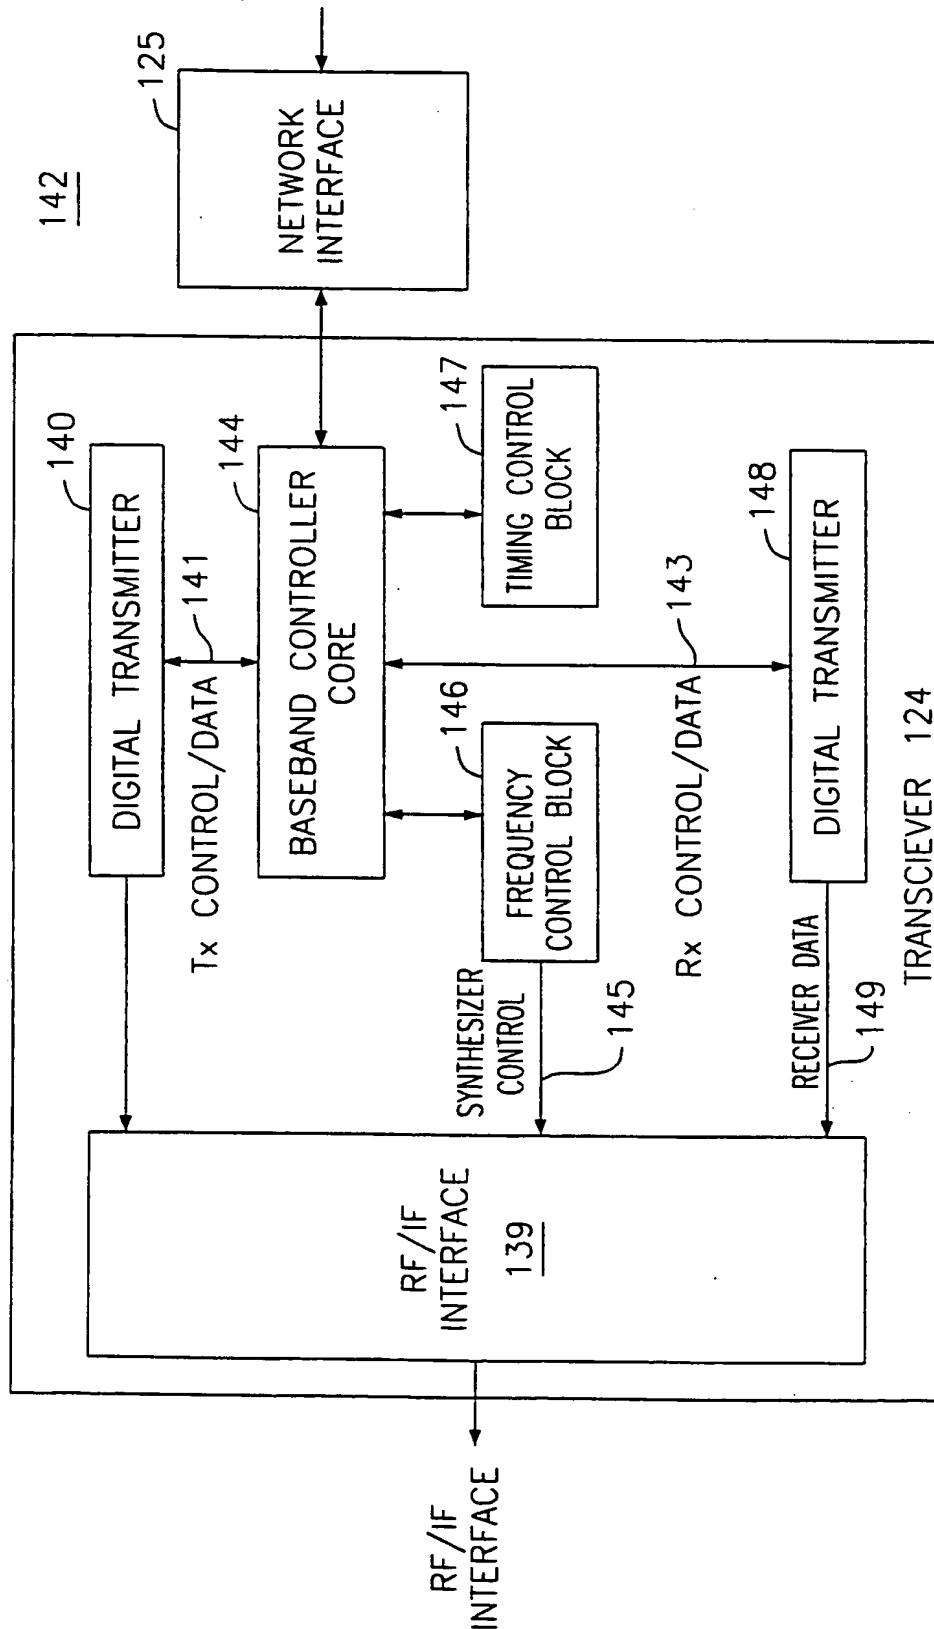


FIG. 6

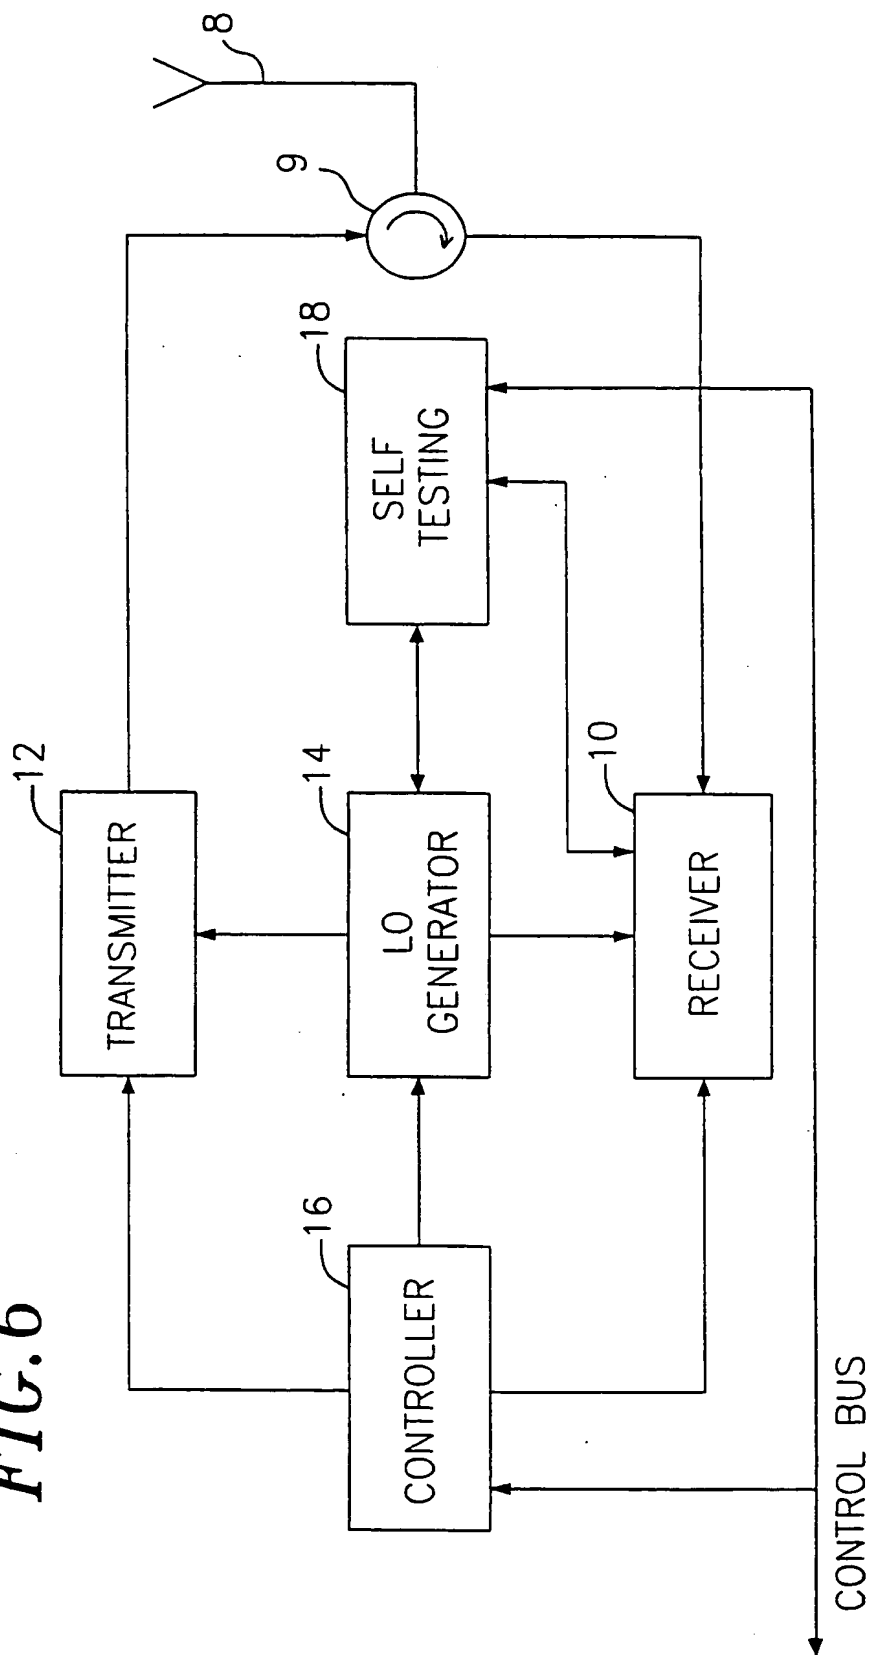


FIG. 8



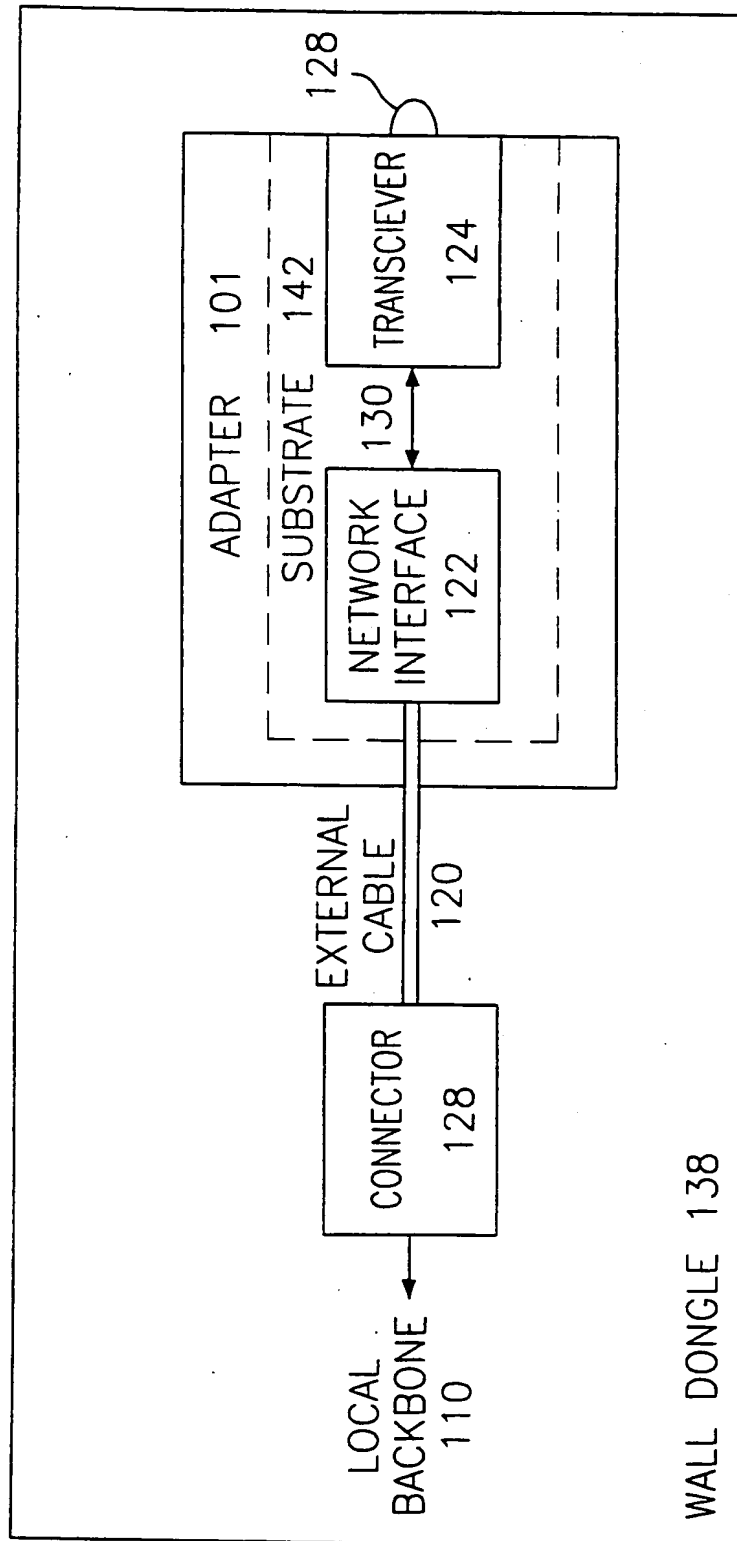


FIG. 9

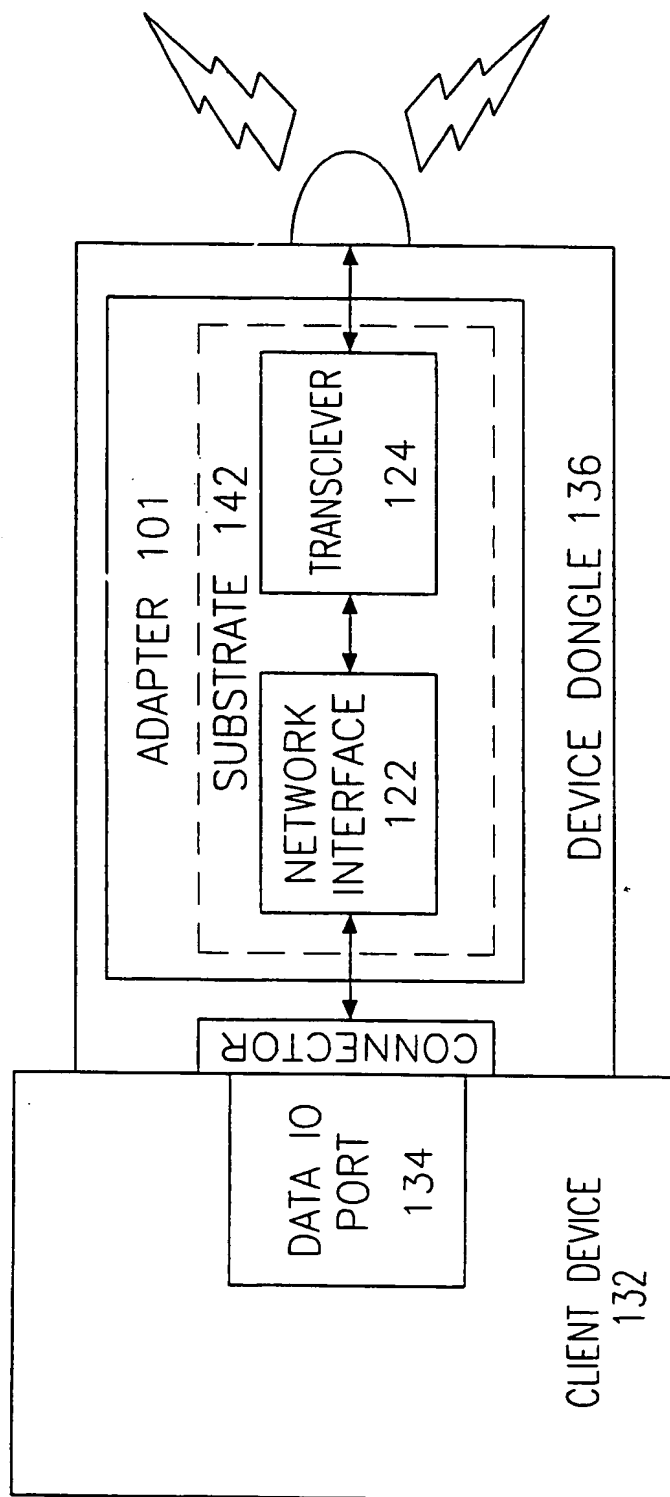

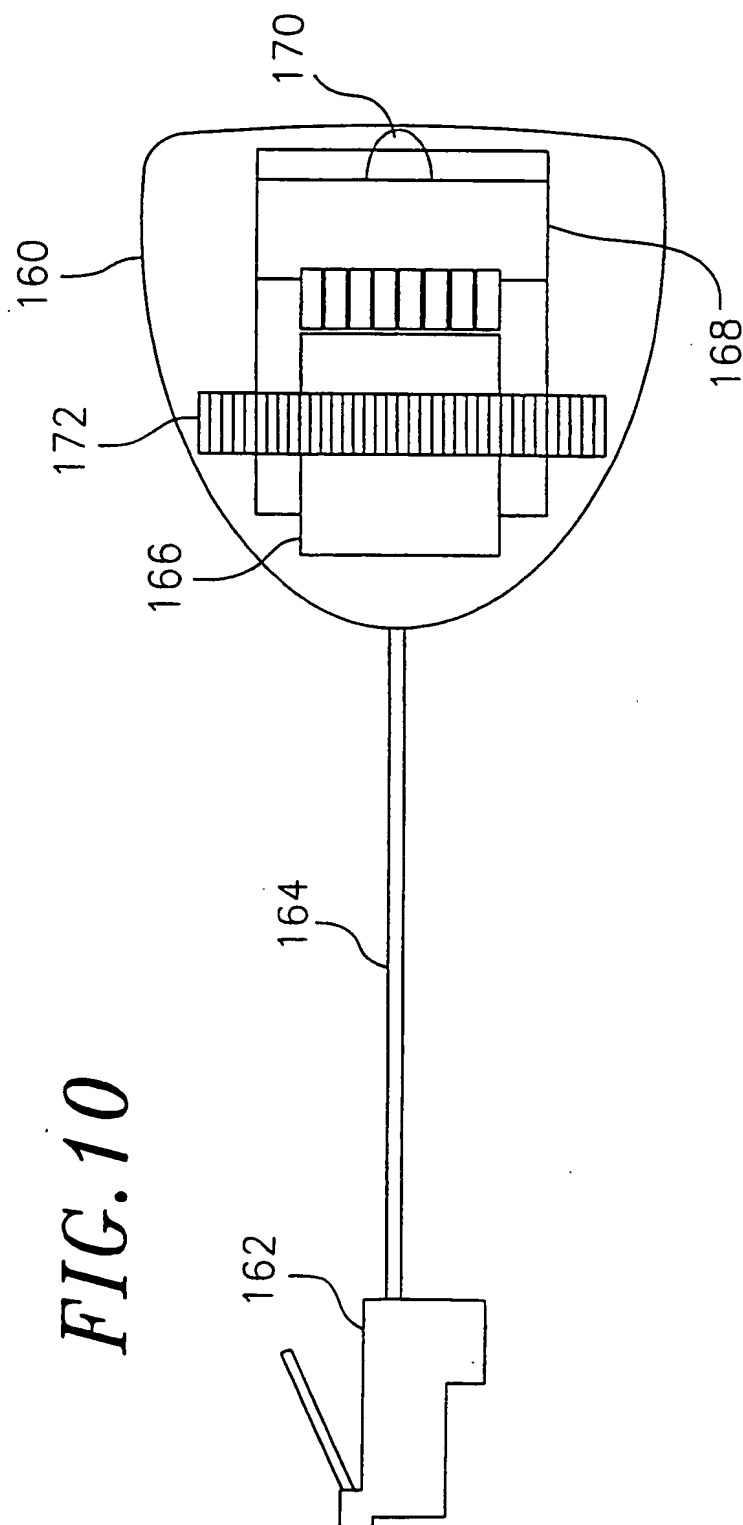

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/30437

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 49850 A (HOME WIRELESS NETWORKS INC) 5 November 1998 (1998-11-05) page 3, line 19 -page 5, line 30 page 7, line 14 -page 8, line 31 page 13, line 13 - line 25 page 15, line 2 - line 23 page 16, line 29 -page 17, line 6 page 19, line 1 - line 19 page 20, line 16 -page 21, line 9 figures 1,3,12,13 ---	1-113
X	EP 0 878 936 A (VICTOR COMPANY OF JAPAN) 18 November 1998 (1998-11-18) column 1, line 50 -column 4, line 23 column 11, line 35 -column 12, line 56 figures 1-5 --- -/--	1-113

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

9 April 2001

Date of mailing of the international search report

17/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Barel, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/30437

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 53680 A (GATEWAY 2000 INC) 21 October 1999 (1999-10-21) page 2, line 18 -page 3, line 6 page 6, line 15 - line 24 page 7, line 27 -page 9, line 9 figures 2D, 3A, 3B -----	1-113
A	HAARTSEN J: "BLUETOOTH - THE UNIVERSAL RADIO INTERFACE FOR AD HOC, WIRELESS CONNECTIVITY" ERICSSON REVIEW, ERICSSON. STOCKHOLM, SE, no. 3, 1998, pages 110-117, XP000783249 ISSN: 0014-0171 * abstract * -----	2, 20, 35, 50, 67, 80, 96, 99

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/30437

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9849850 A	05-11-1998	US 6058104 A	02-05-2000
		AU 6682198 A	24-11-1998
		BR 9804867 A	24-08-1999
		CA 2255596 A	05-11-1998
		DE 69800527 D	22-03-2001
		EP 1049342 A	02-11-2000
		EP 0909521 A	21-04-1999
		ES 2154076 T	16-03-2001
		JP 2000514634 T	31-10-2000
		TW 411687 B	11-11-2000
EP 0878936 A	18-11-1998	CN 1199973 A	25-11-1998
		JP 11098156 A	09-04-1999
		SG 63846 A	30-03-1999
WO 9953680 A	21-10-1999	US 6067583 A	23-05-2000
		AU 3552899 A	01-11-1999

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.